

INSPECTION BY MUNICIPALITY — FINAL GRADING REMOVE UNNEEDED SUBGRADE FROM SITE.

AT LEAST 2 DAYS PRIOR TO FINISH.

CALL FOR INSPECTION FROM THE APPROPRIATE MUNICIPAL AGENCY HAVING JURISDICTION

ANY ALTERATIONS OR REVISIONS OF THESE PLANS, UNLESS DONE BY OR

UNDER THE DIRECTION OF THE NYS LICENSED AND REGISTERED ENGINEER

THAT PREPARED THEM, IS A VIOLATION OF THE NYS EDUCATION LAW.

LEGEND

 $- \times - \times -$ SF


PERC. = 2.75" INCHES/HOUR (COMPACT BROWN LOAM) (BROWN SANDY LOAM) NO GROUNDWATER PERC. = 0.75" INCHES/HOUR

> (LIGHT BROWN LOAM) NO GROUNDWATER PERC. = 1" INCH/HOUR

(BROWN SANDY LOAM) (COMPACT BROWN LOAM) NO GROUNDWATER

(COMPACT SANDY LOAM) NO GROUNDWATER

Stone & Block Drop Inlet Protection

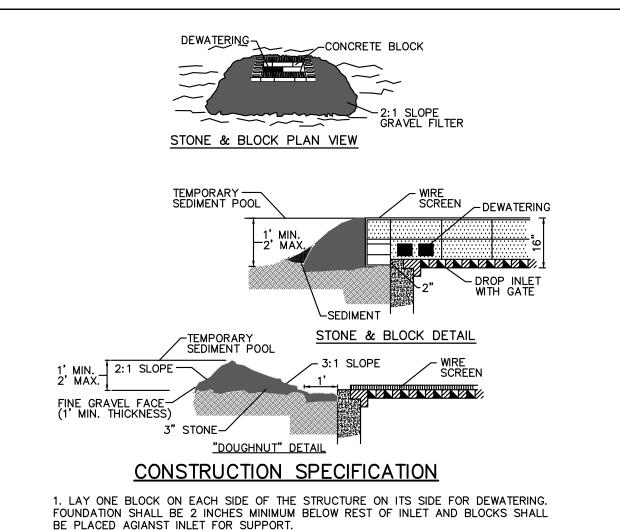


4. FOR STONE STRUCTURES ONLY, A 1 FOOT THICK LAYER OF THE FILTER STONE WILL BE PLACED AGAINST THE 3 INCH STONE AS SHOWN ON THE DRAWINGS. MAXIMUM

Silt Fence

2. HARDWARECLOTH OR 1/2" WIRE MESH SHALL BE PLACED OVER BLOCK OPENINGS TO

3. USE CLEAN STONE OR GRAVEL 1/2-3/4 INCH IN DIAMETER PLACED 2 INCHES BELOW

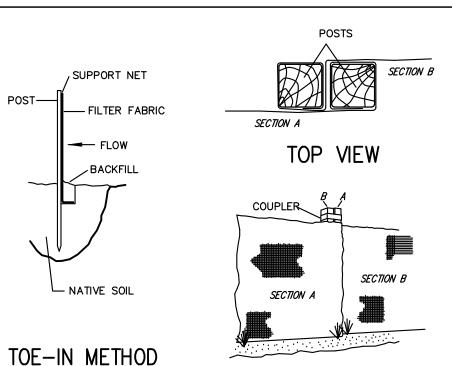

JOINING SECTIONS OF FENCING


INSTALLATION NOTES:

TOP OF BLOCK ON A 2:1 SLOPE OR FLATTER.

DRAINAGE AREA 1 ACRE.

1. EXCAVATE A 4 INCH * 4 INCH TRENCH ALONG THE LOWER PERIMETER OF THE SITE.
2. UNROLL A SECTION AT A TIME AND POSITION THE POSTS AGAINST THE BACK (DOWNSTREAM) WALL OF THE TRENCH (NET SIDE AWAY FROM DIRECTION OF FLOW). . DRIVE THE POST INTO THE GROUND UNTIL THE NETTING IS APPROXIMATELY 2 INCHES FROM THE TRENCH BOTTOM.
4. LAY THE TOE-IN FLAP OF FABRIC ONTO THE UNDISTURBED BOTTOM OF THE TRENCH, BACKFILL THE TRENCH AND TAMP THE SOIL. STEEPER SLOPES REQUIRE AN INTERCEPT 5. JOIN SECTIONS AS SHOWN ABOVE.

Soil Stockpiling

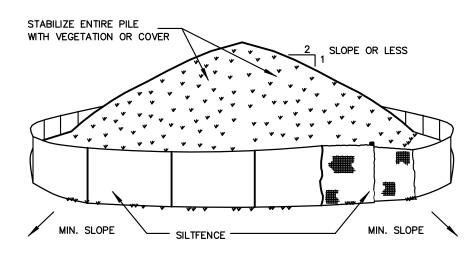

INSTALLATION NOTES

INSTALLATION NOTES:

1. AREA CHOSEN FOR STOCKPILING OPERATIONS SHALL BE DRY AND STABLE.

2. SOILS OR FILL TO BE STOCKPILED ON SITE DURING CUTTING AND FILLING ACTIVITIES SHOULD BE LOCATED ON LEVEL PORTIONS OF THE SITE WITH A MINIMUM OF 50-75 FOOT 3. MAXIMUM SLOPE OF STOCKPILE SHALL BE 1:2.
4. UPON COMPLETION OF SOIL STOCKPILING, EACH PILE SHALL BE SURROUNDED WITH EITHER SILT FENCING OR STRAWBALES, THEN STABILIZED WITH VEGETATION OR COVERED.

5. STOCKPILES REMAINING IN PLACE FOR MORE THAN A WEEK SHOULD BE SEEDED AND MULCHED OR COVERED WITH GEOTEXTILE FABRIC SURROUNDED BY SILT FENCE. 6. SEE SPECIFICATIONS (THIS MANUAL) FOR INSTALLATION OF SILT FENCE.

PROPOSED SITE IMPROVEMENTS 40 SOMERSTOWN ROAD TOWN OF OSSINING WESTCHESTER COUNTY - NEW YORK



STORMWATER MANAGEMENT PLAN

HUDSON



ENGINEERING CONSULTING, P.C. 45 Knollwood Road – Suite 201 Elmsford, New York 10523 T: 914-909-0420

© 2016 F: 914-560-2086

(IN FEET) 1 inch = 40 ft.

