

LOCATION MAP

SITE DATA:

WATER FACILITIES:

MGM DESIGN & CONSTRUCTION GROUP, LLC 317 ELWOOD AVENUE HAWTHORNE, NY 10532 OWNER / DEVELOPER:

PUBLIC WATER FACILITIES

PROJECT LOCATION: 5 HAWKES AVENUE OSSINING, NY 10562 EXISTING TOWN ZONING: R-20, ONE-FAMILY RESIDENTIAL

R-20, ONE-FAMILY RESIDENTIAL PROPOSED USE: TOWN TAX MAP DATA: SECTION 2, BLOCK 4, LOT 26 SITE AREA: 2.15 ACRES (90,695.23 SF) SEWAGE FACILITIES: **PUBLIC SEWERS**

ZONING SCHEDULE:


ZONING DISTRICT: R-20, ONE FAMILY RESIDENTIAL				SIDENTIAL
DIMENSIONAL REGULATIONS:	REQUIRED	<u>LOT 1</u>	LOT 2	VARIANCE REQUIRED
MINIMUM SIZE OF LOT:				
MINIMUM LOT AREA: MINIMUM LOT WIDTH:	20,000 SF. 100 FT.	20,047 SF. 168.3 FT.	73,649 SF. 272.8 FT.	NONE NONE
MINIMUM LOT DEPTH:	130 FT.	130.0 FT.	440.3 FT.	NONE
MINIMUM YARD DIMENSIONS:				
PRINCIPAL BUILDING:				
FRONT YARD SETBACK:	30 FT.	30.5 FT.	30.1 FT.	NONE
REAR YARD SETBACK:	34 FT.	34.0 FT.	229.1 FT.	NONE
ONE SIDE YARD SETBACK:	16 FT.	16.3 FT.	16.0 FT.	NONE
COMBINED SIDE YARD SETBACK:	34 FT.	100.0 FT.	63.0 FT.	NONE
MAXIMUM % OF LOT TO BE OCCUPIED:				
LOT COVERAGE:	SEE NOTE 1	3,301 SF	5,279 SF	NONE
BUILDING COVERAGE:	22%	10.7%	2.9%	NONE
LIVABLE FLOOR AREA PER DU:	850 SF	3,234 SF	3,234 SF	NONE
NON WETLAND/STEEP SLOPE:	SEE NOTE 2	19,543 SF	39,986 SF	
MAXIMUM HEIGHT:				
PRINCIPAL BUILDING - FEET: PRINCIPAL BUILDING - STORIES:	35 FEET 2 1/2	30 FEET 2 1/2	30 FEET 2 1/2	NONE NONE

REQUIRED AREA IS 15,000 SF.


ZONING REGULATION NOTES:

1. MAX IMPERVIOUS COVERAGE SHALL BE PER SECTION 200-21(B). 2. PER SECTION 176-18.F & F(1), AT LEAST 75% OF THE MINIMUM LOT AREA REQUIREMENT OF A PROPOSED LOT SHALL CONSIST OF NEITHER "WETLAND" NOR "EXTREMELY STEEP SLOPE" FOR THE R-20 ZONE, THE


THE HOME LOCATED ON LOTS #1 AND #2 SHALL NOT BE SHIFTED CLOSER TO THE SOUTHERLY LOT LINE WITHOUT ADDITIONAL PLANNING/ARCHITECTURAL REVIEW BOARD APPROVAL.

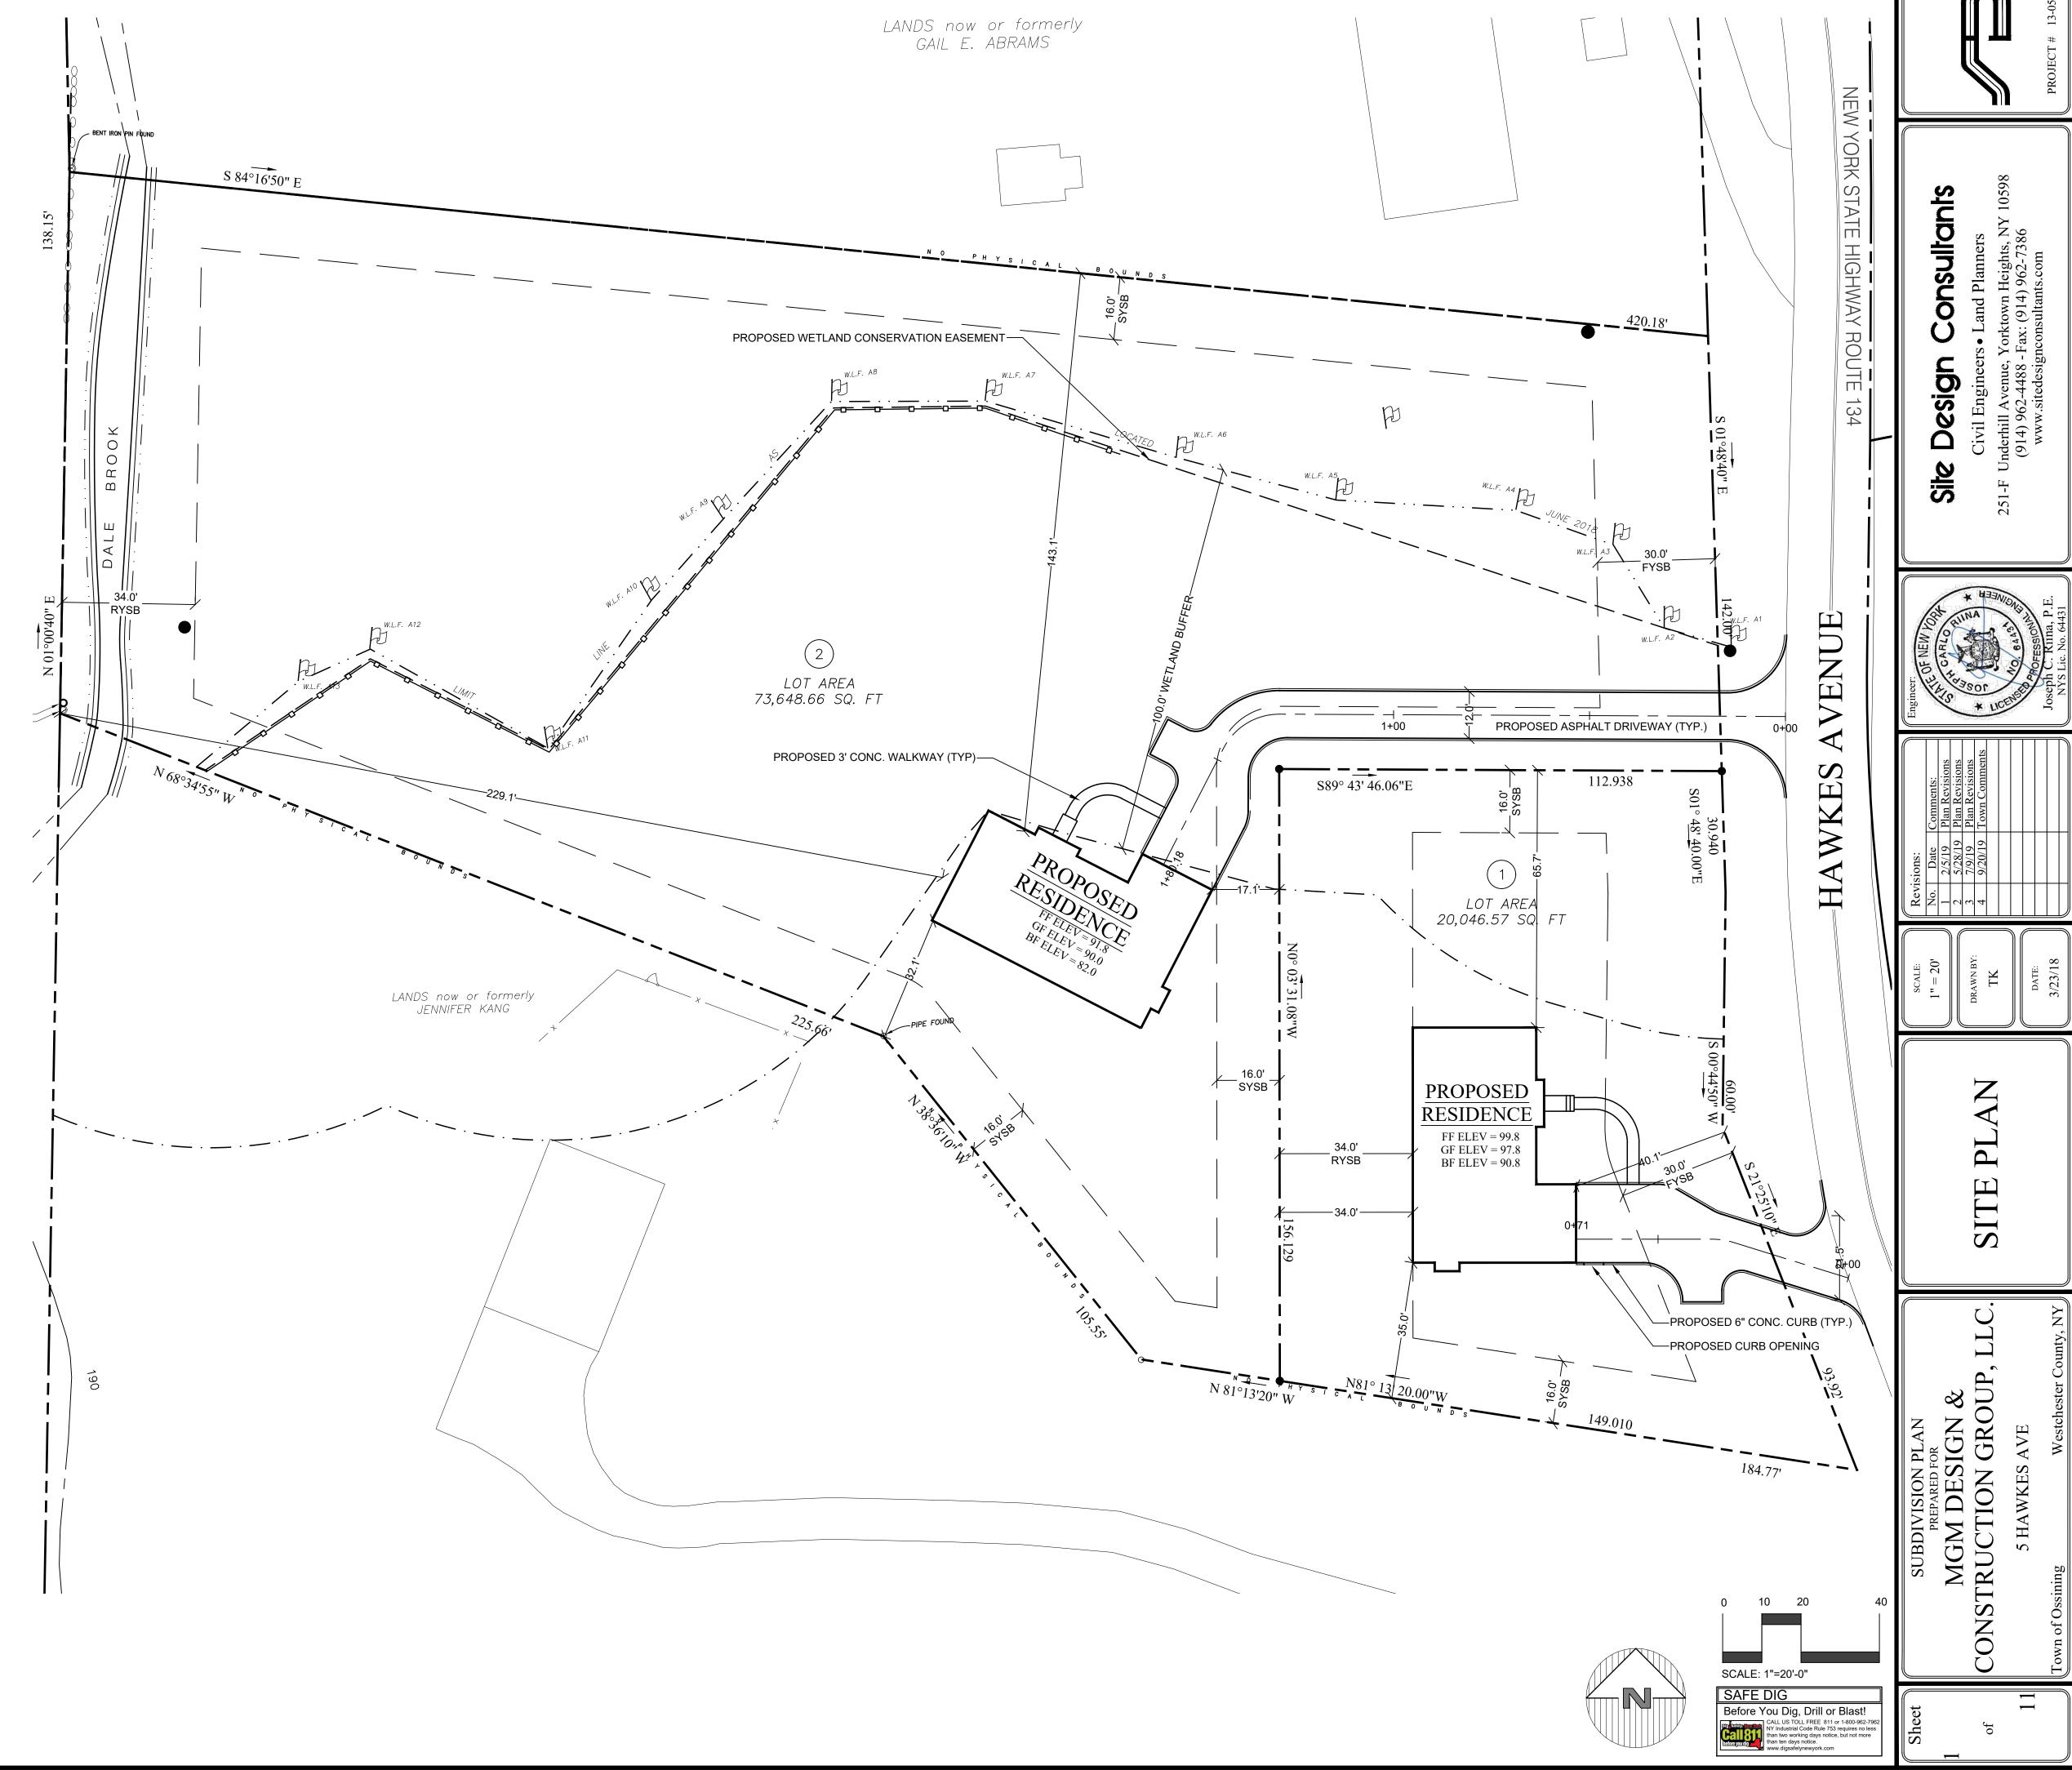



THIS IS NOT A SURVEY. ALL SURVEY INFORMATION SHOWN ON THIS PLAN HAS BEEN TAKEN FROM SURVEY MAP PREPARED BY LINK LAND SURVEYORS, P.C., DATED 12/23/04, LAST REVISED 6/28/05. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR ITS ACCURACY.

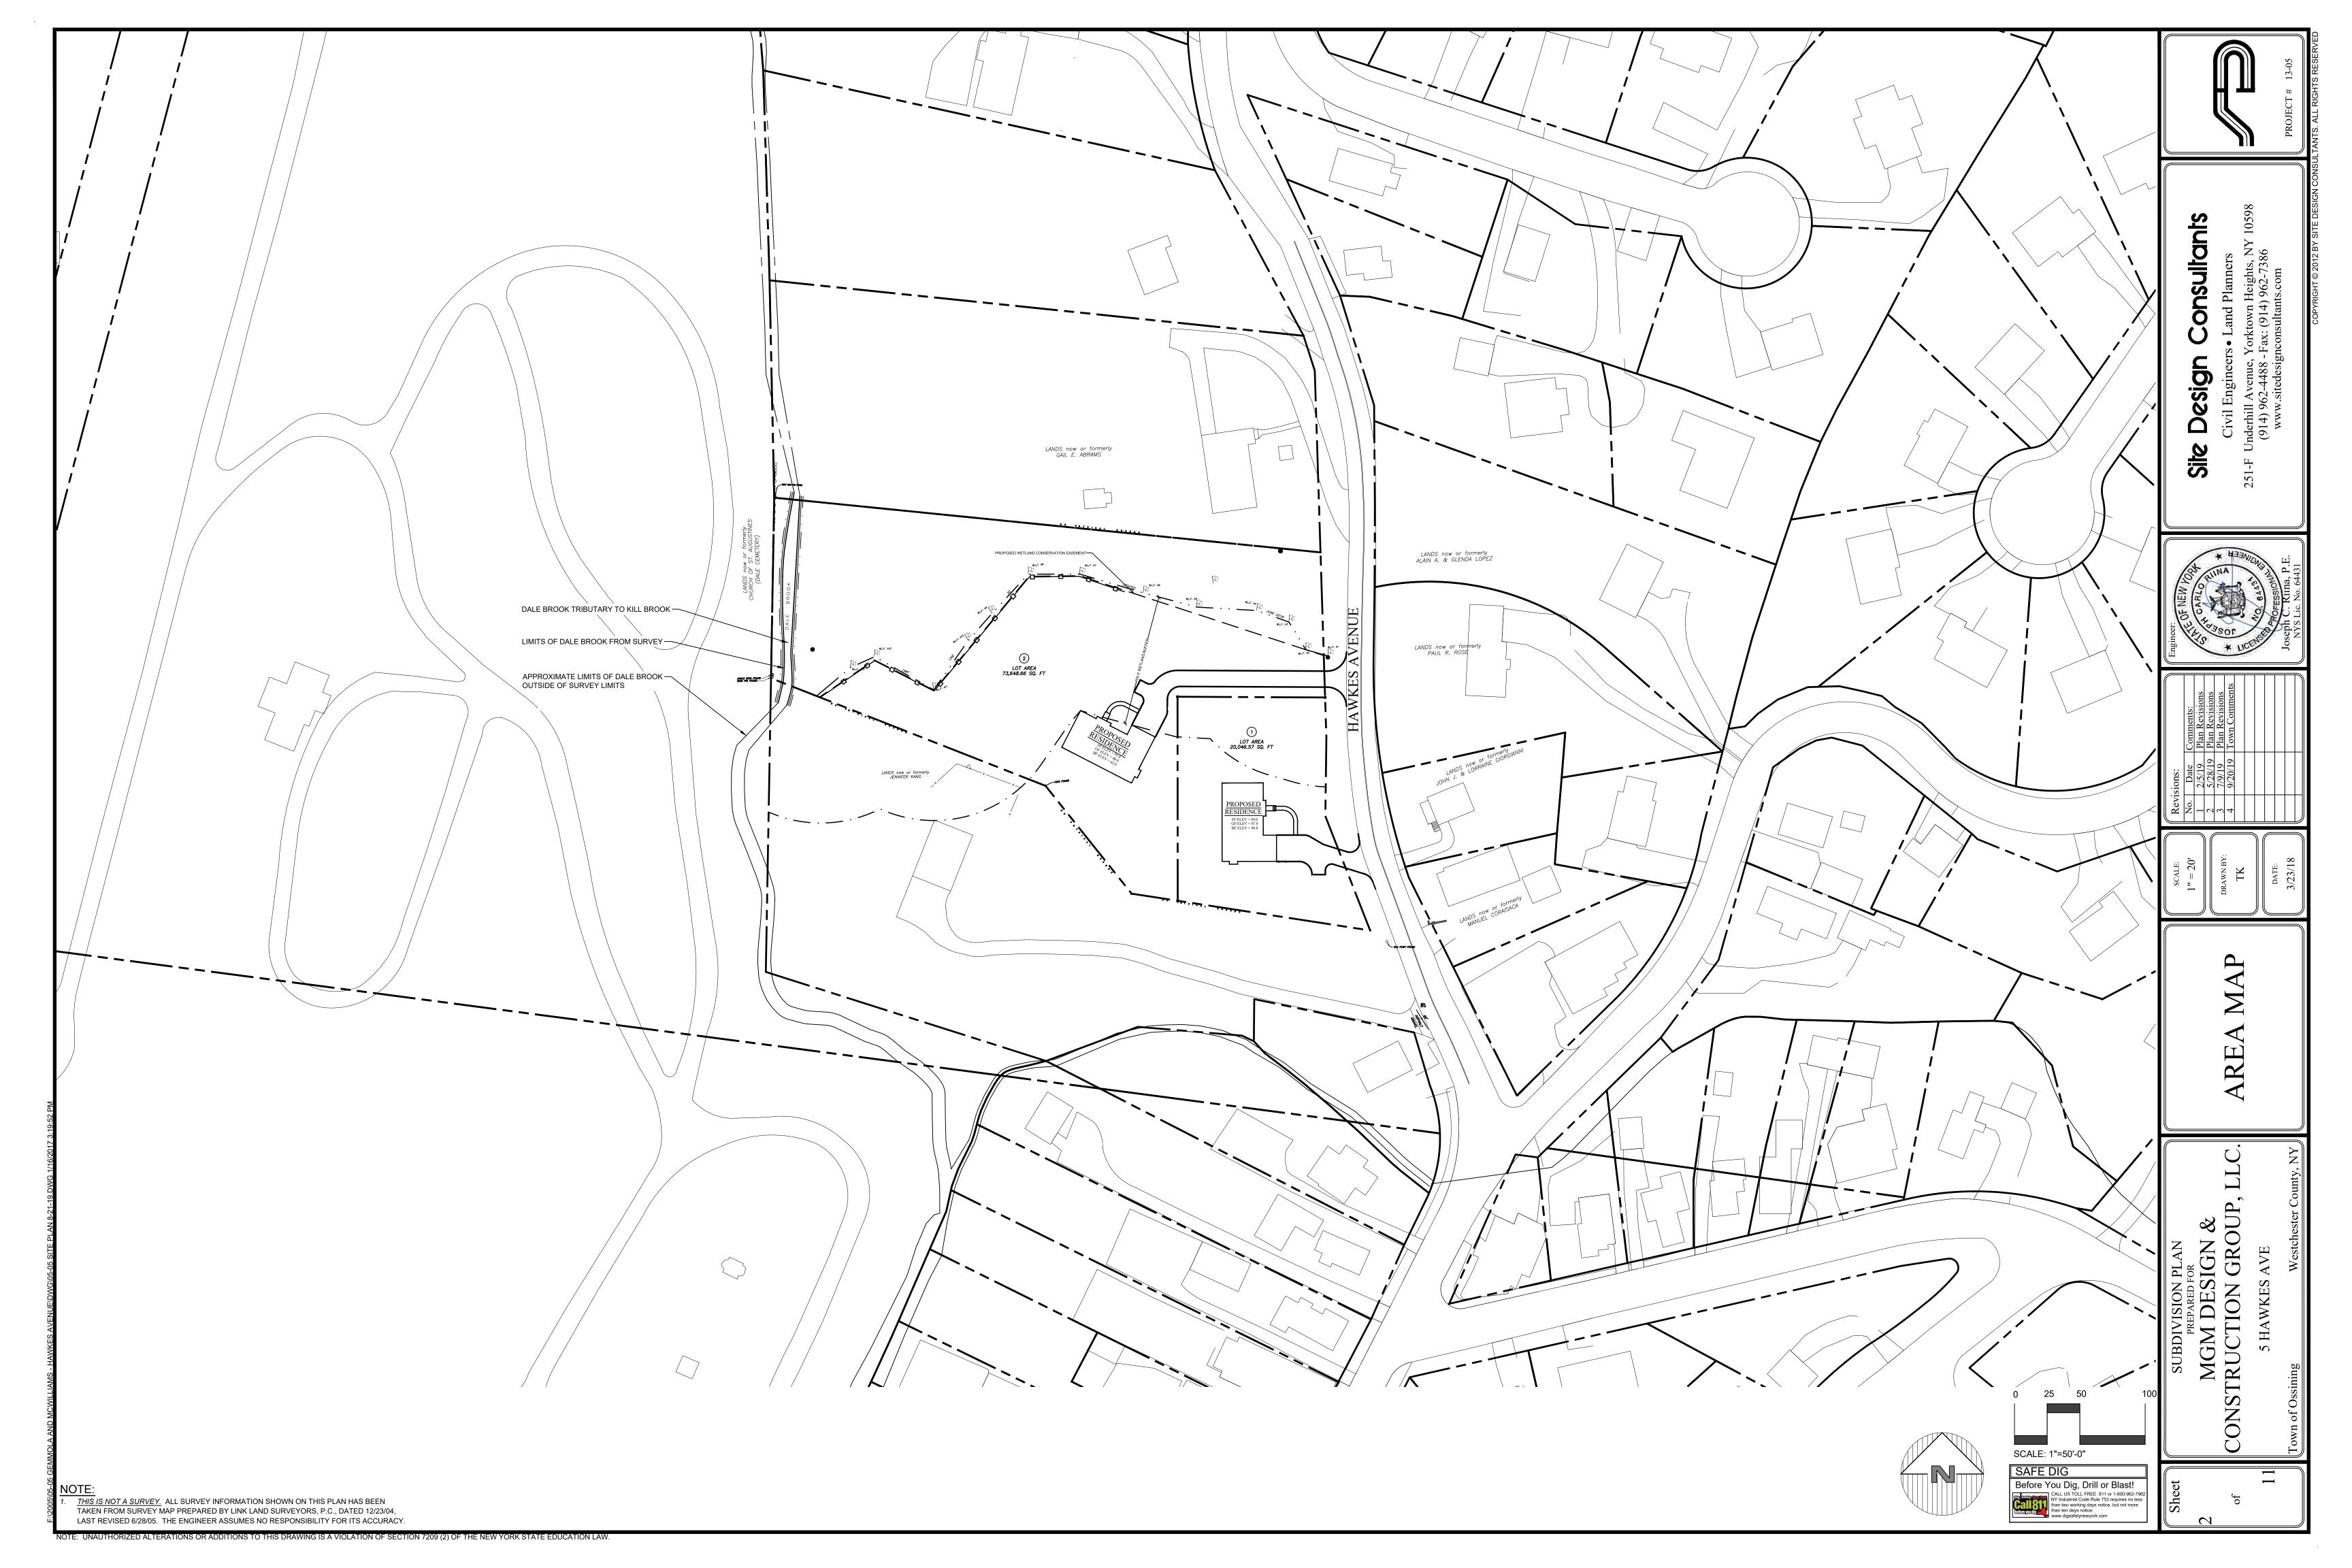




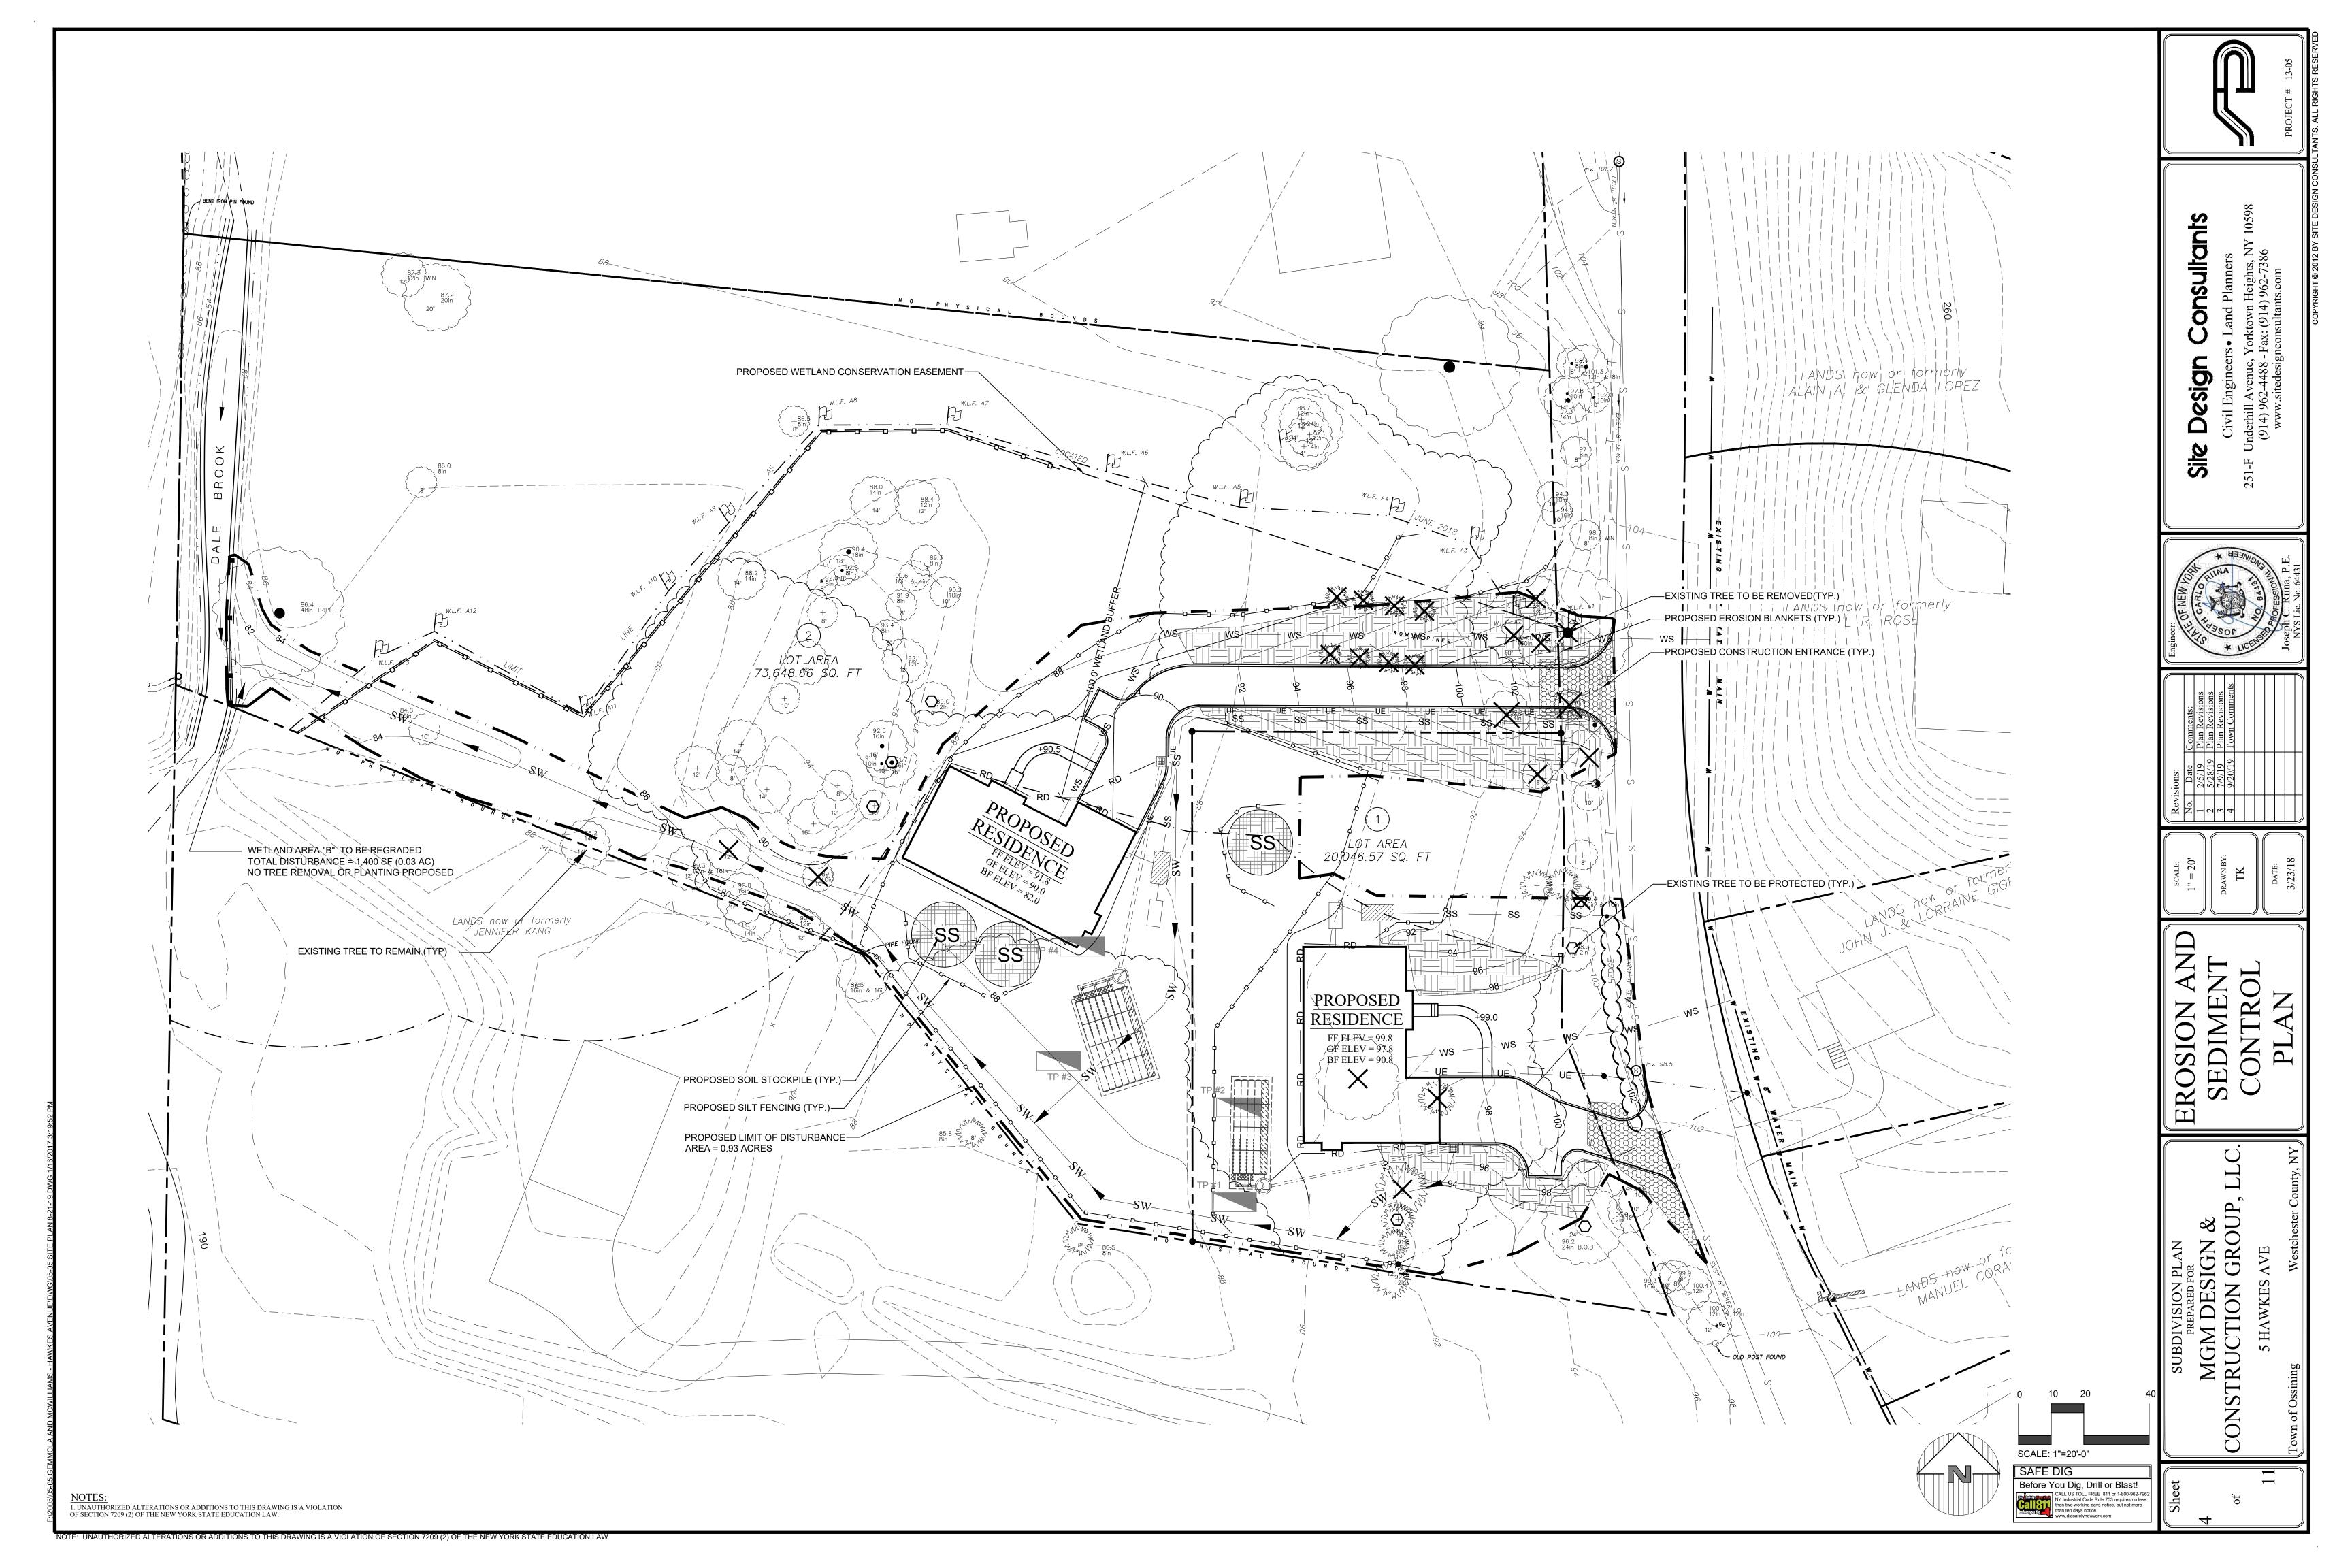

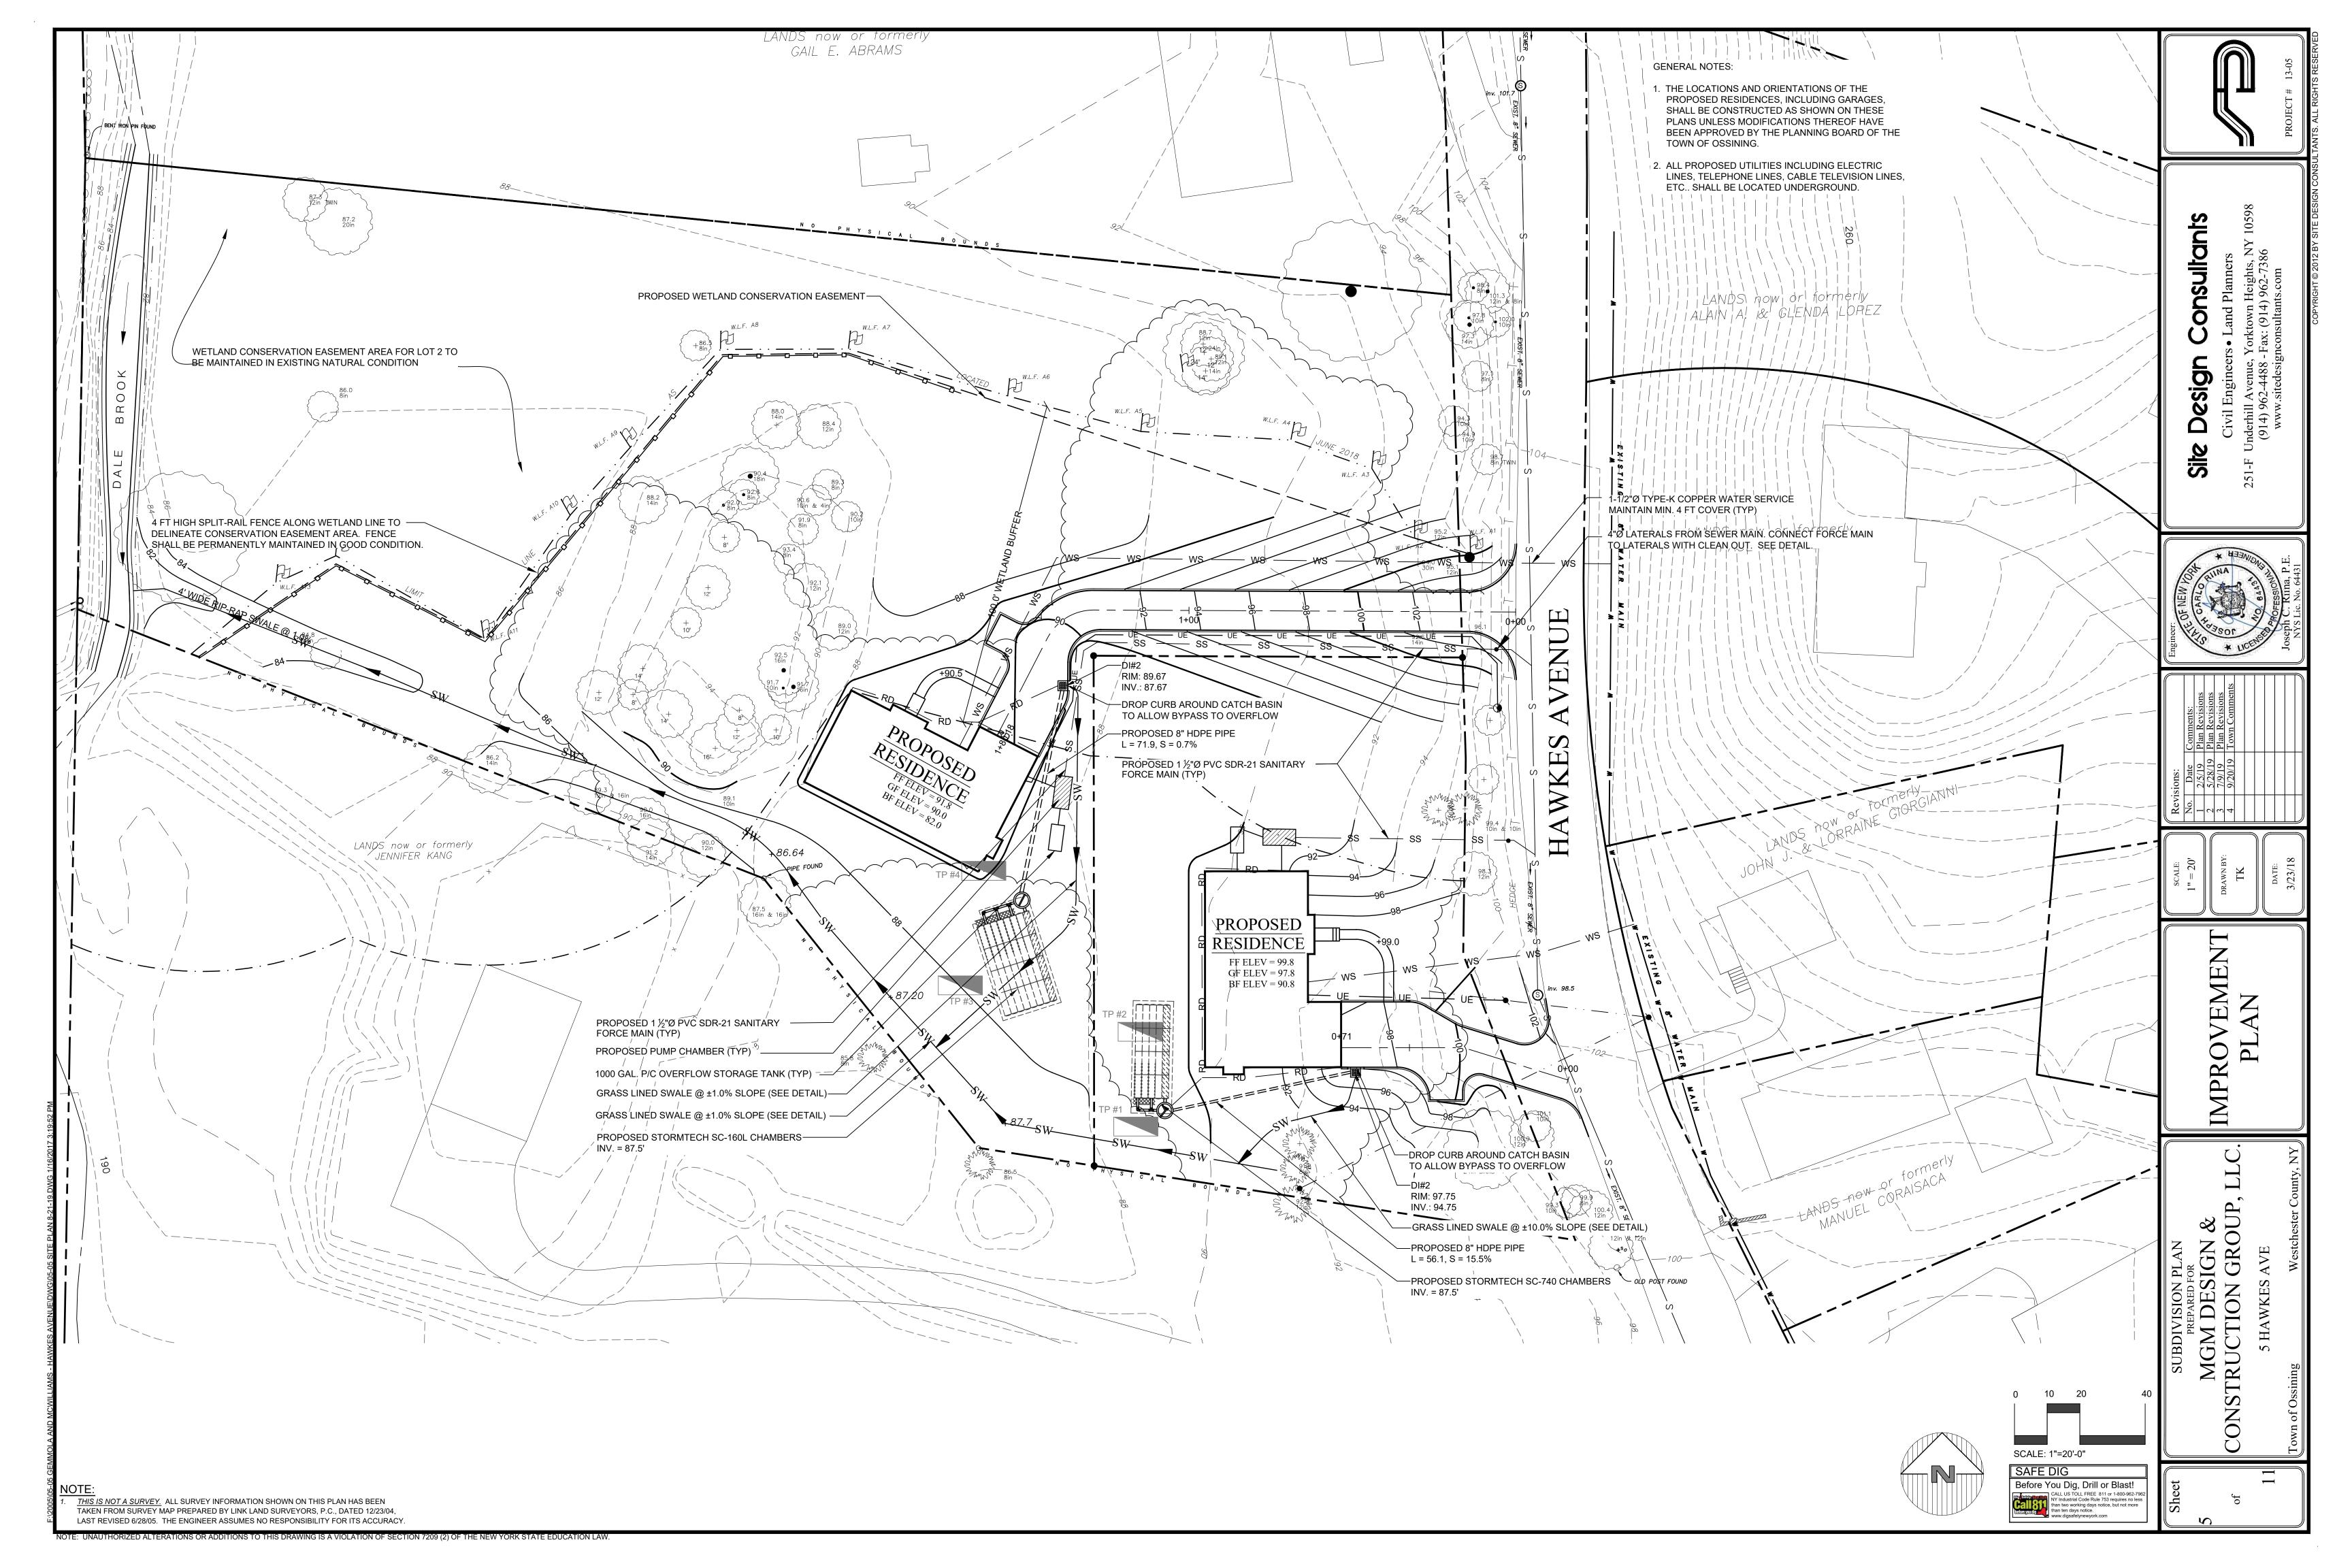

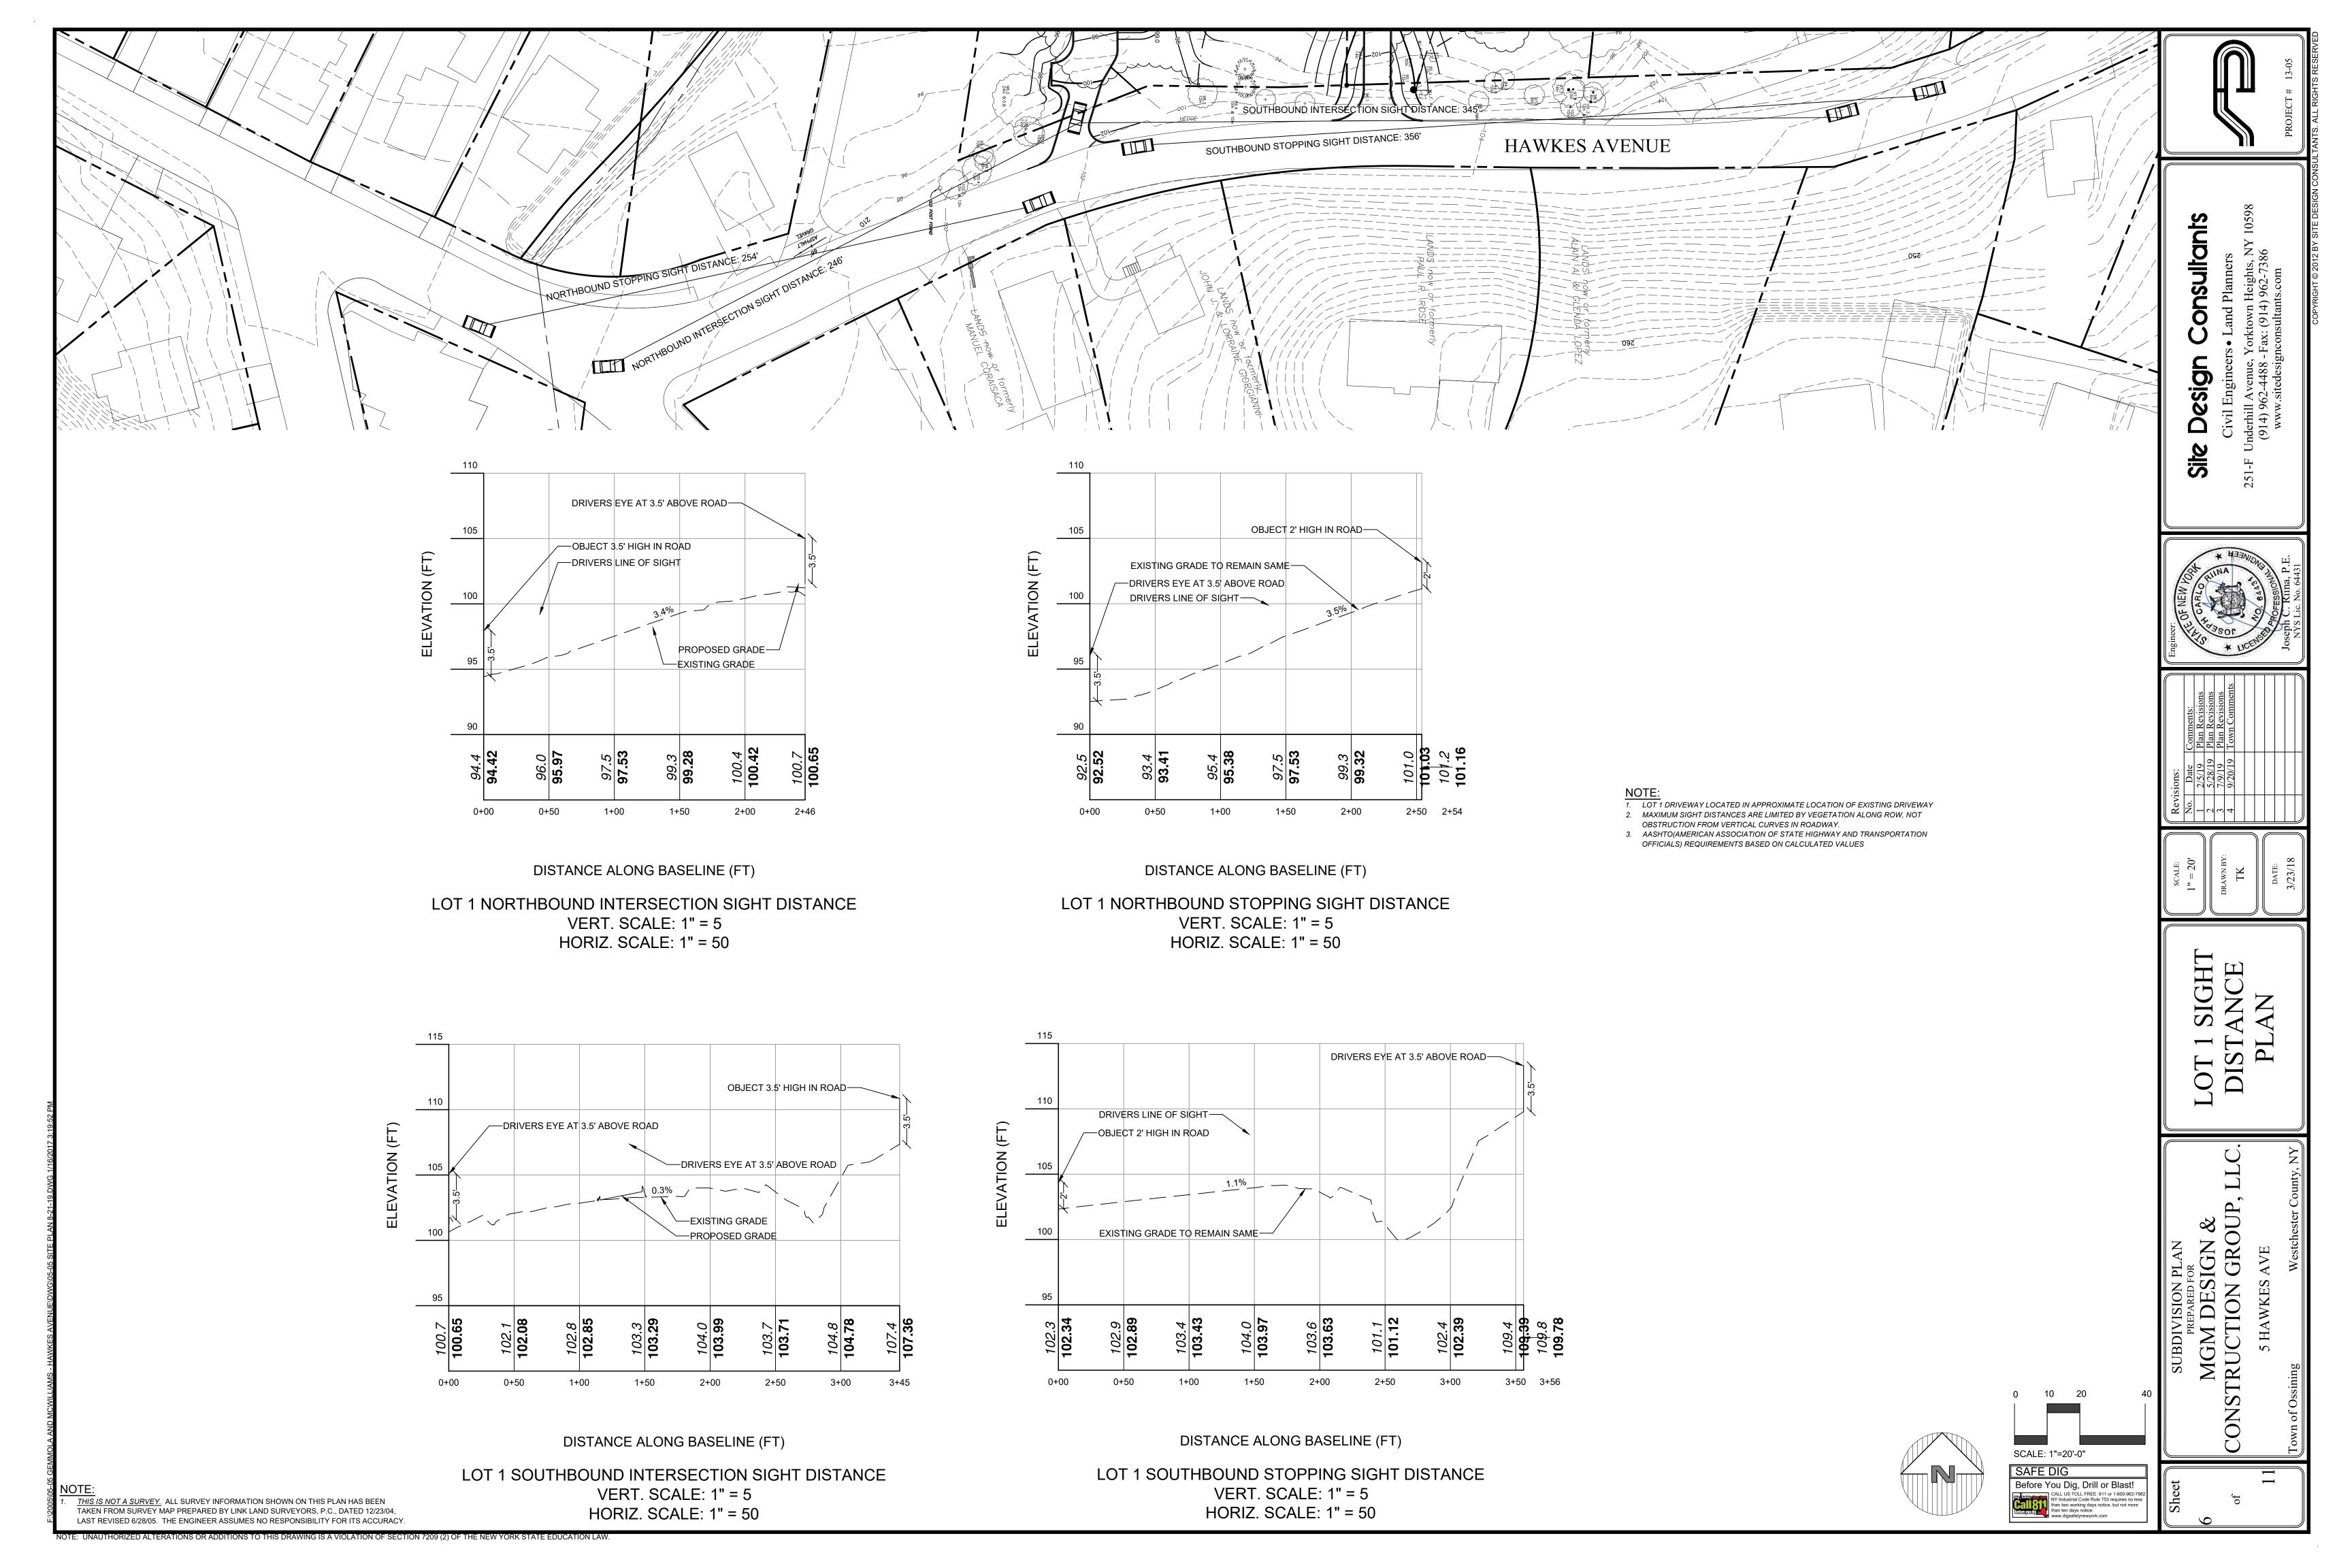

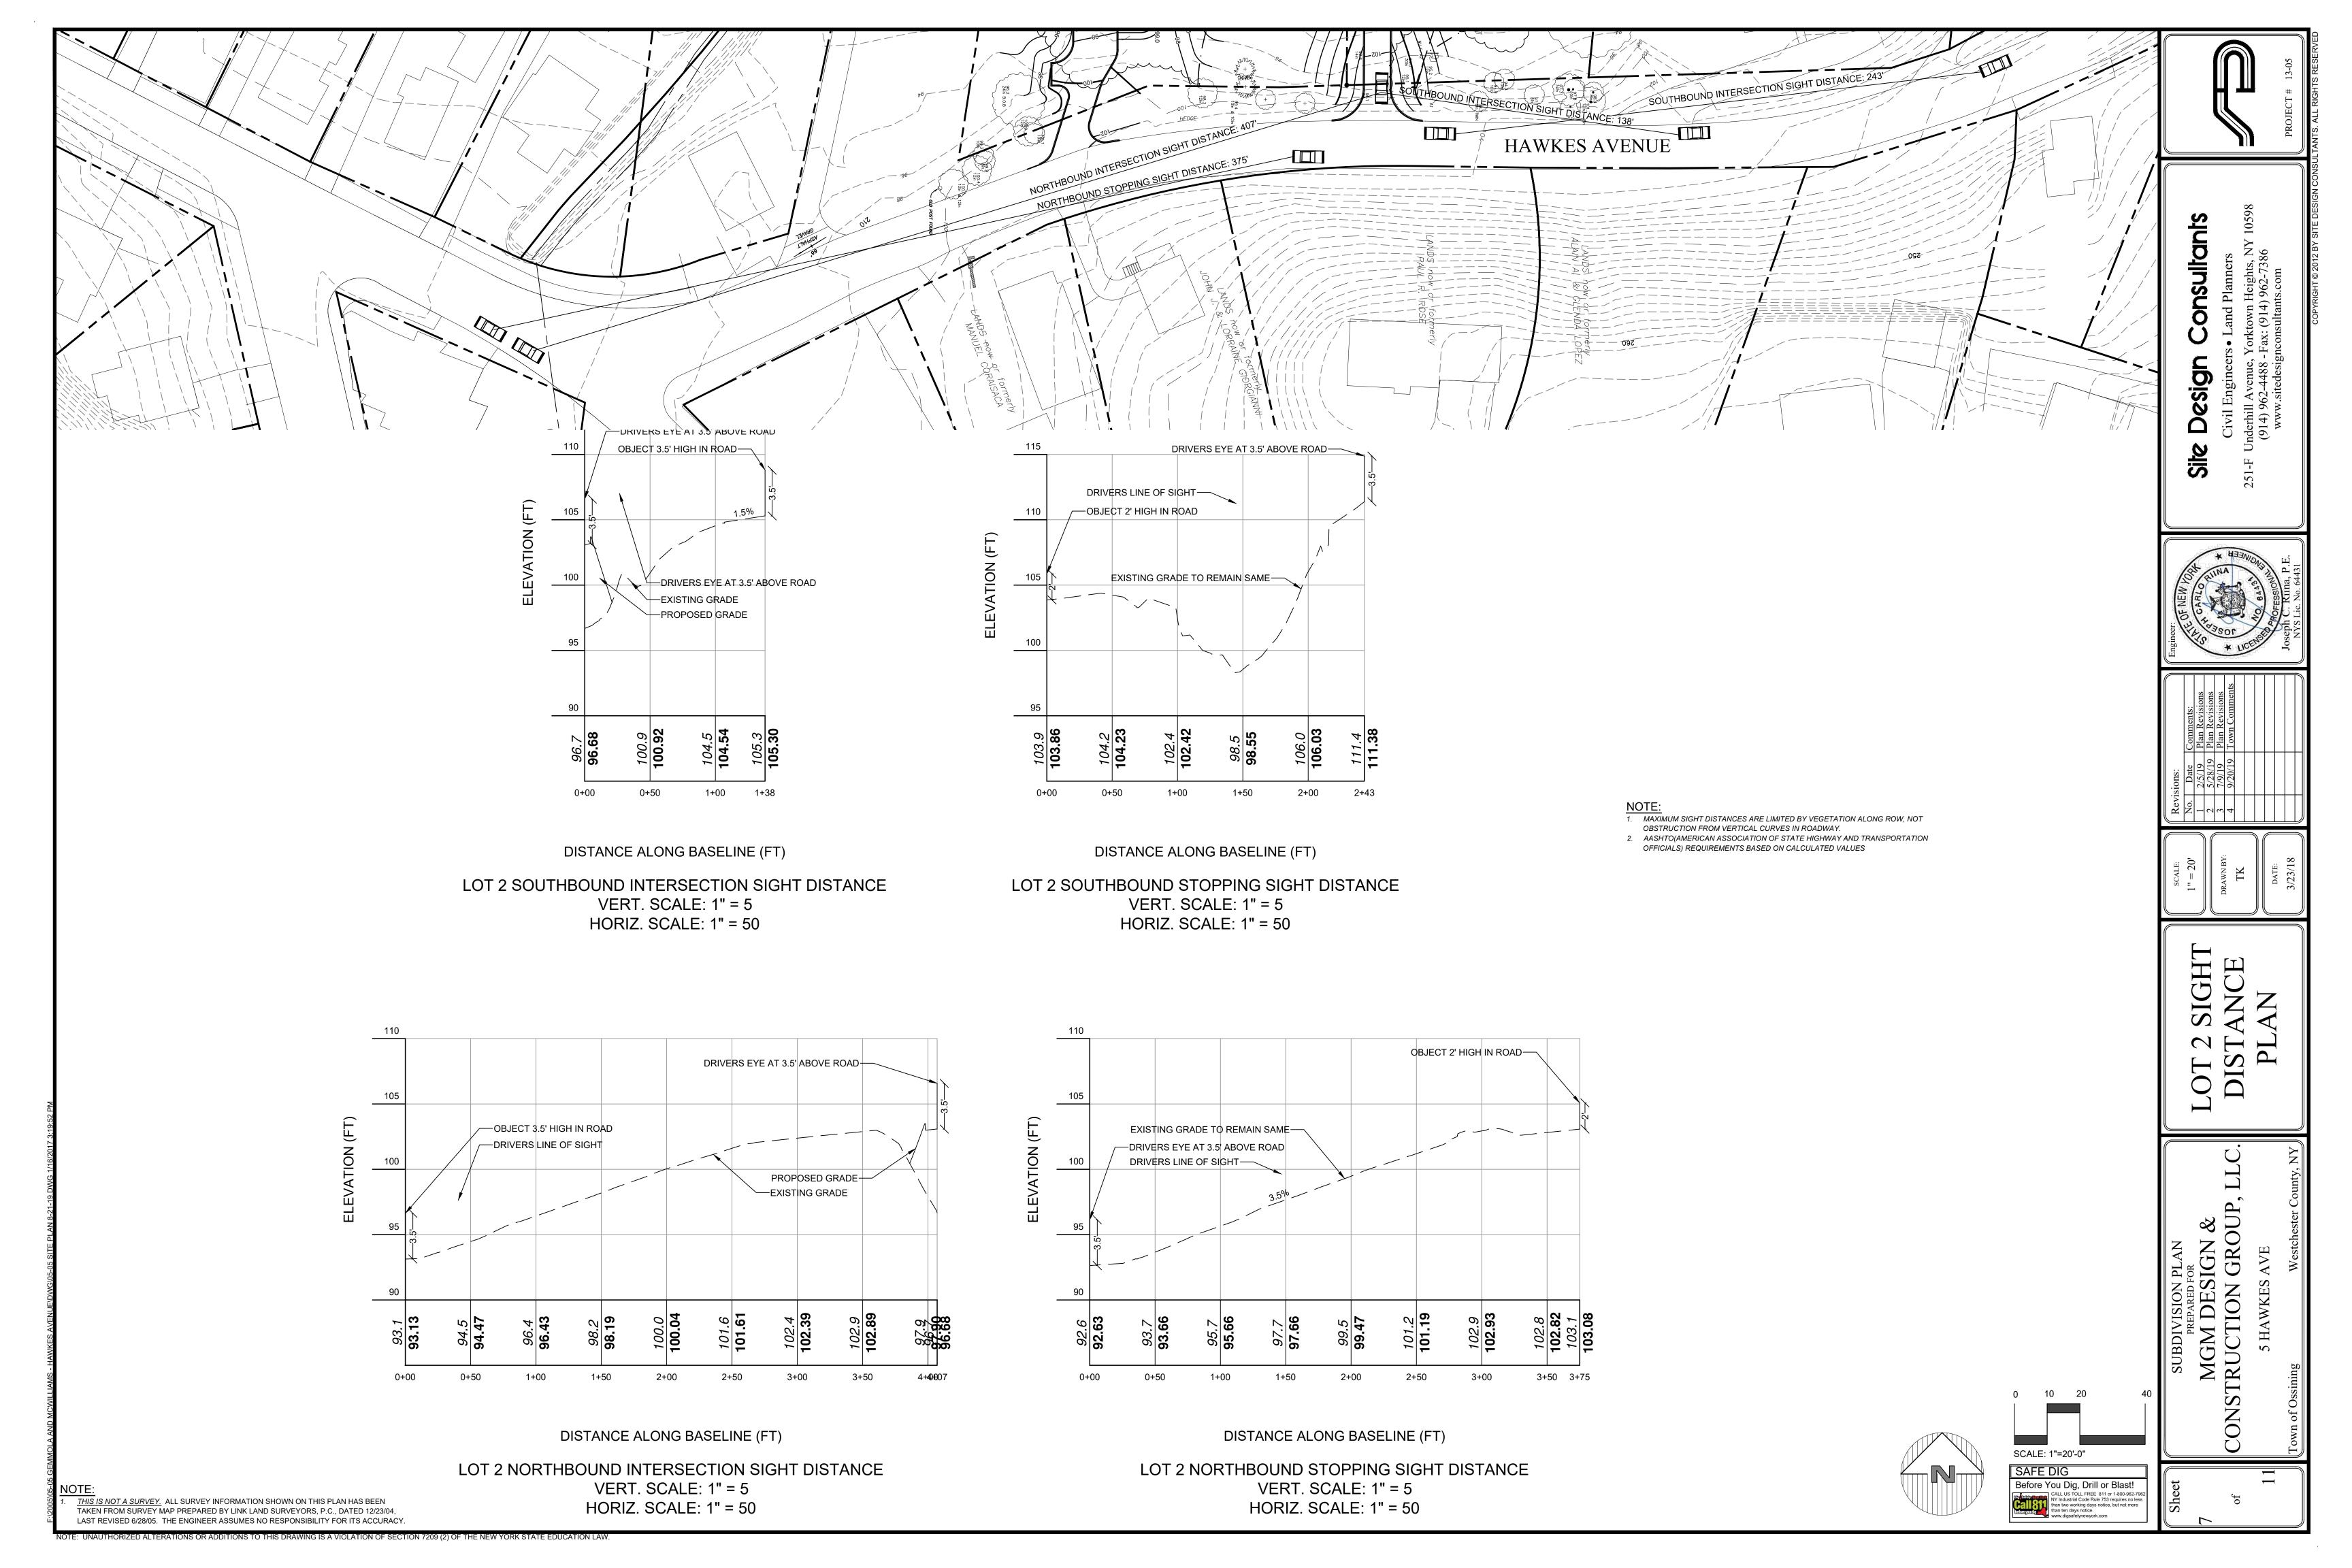

GENERAL EROSION CONTROL NOTES: . Contractor shall be responsible for compliance with all sediment and erosion control practices. The sediment and erosion control practices are to be installed prior to any major soil disturbances, and maintained until permanent protection is established. Road surface flows from the site should be dissipated with tracking pad or appropriate measures during adjacent road shoulder regrading. Contractor is responsible for the installation and maintenance of all soil erosion and sedimentation control devices throughout the course of construction. Catch basin inlet protection must be installed and operating at all times until tributary areas have been stabilized. When possible flows should be stabilized before reaching inlet protection structure. Timely maintenance of sediment control structures is the responsibility of the Contractor. All structures shall be maintained in good working order at all times. The sediment level in all sediment traps shall be closely monitored and sediment removed rain to insure proper operation as designed. An inspection schedule shall be set forth prior to the start of construction.

promptly when maximum levels are reached or as ordered by the engineer. All sediment control structures shall be inspected on a regular basis, and after each heavy

The locations and the installation times of the sediment capturing standards shall be as specified in these plans, as ordered by the Engineer, and in accordance with the latest edition of the "New York Standards and Specifications for Erosion and Sediment Control" (NYSSESC).

All topsoil shall be placed in a stabilized stockpile for reuse on the site. All stockpile material required for final grading and stored on site shall be temporarily seeded and mulched within 7 days. Refer to soil stockpile details.

. Any disturbed areas that will be left exposed more than 7 days and not subject to construction traffic, shall immediately receive temporary seeding. Mulch shall be used if the season prevents the establishment of a temporary cover. Disturbed areas shall not be limed and fertilized prior to temporary seeding.

All disturbed areas within 500 feet of an inhabited dwelling shall be wetted as necessary to provide dust control.

8. The contractor shall keep the roadways within the project clear of soil and debris and is responsible for any street cleaning necessary during the course of the project. 9. Sediment and erosion control structures shall be removed and the area stabilized when the drainage area has been properly stabilized by permanent measures. 10. All sediment and erosion control measures shall be installed in accordance with current edition of NYSSESC

11. All regraded areas must be stabilized appropriately prior to any rock blasting, cutting, and/or filling of soils. Special care should be taken during construction to insure stability during maintenance and integrity of control structures.

12. Any slopes graded at 3:1 or greater shall be stabilized with erosion blankets to be staked into place in accordance with the manufactures requirements. Erosion blankets may also be required at the discretion of Town officials or Project Engineer. When stabilized blanket is utilized for channel stabilization, place all of the volume of seed mix prior to laying net, or as recommended by the manufacturer.

13. To prevent heavy construction equipment and trucks from tracking soil off-site, construct a pervious crushed stone pad. Locate and construct pads as detailed in

14. Contractor is responsible for controlling dust by sprinkling exposed soil areas periodically with water as required. Contractor to supply all equipment and water 15. Contractor shall be responsible for construction inspections as per NYSDEC GP-0-15-002 and Town of Yorktown.

MAINTENANCE OF TEMPORARY EROSION AND SEDIMENT CONTROL STRUCTURES:

N.Y.S.D.E.C. GP-0-15-002 EXPOSURE RESTRICTIONS - States that any exposed earthwork shall be stabilized in accordance with the guidelines of this plan.

- 1. Trees and vegetation shall be protected at all times as shown on the detail drawing and as directed by the Engineer. 2. Care should be taken so as not to channel concentrated runoff through the areas of construction activity on the site.
- . Fill and site disturbances should not be created which causes water to pond off site or on adjacent properties.
- 4. Runoff from land disturbances shall not be discharged or have the potential to discharge off site without first being intercepted by a control structure, such as a sediment trap or silt fence. Sediment shall be removed before exceeding 50% of the retention structure's capacity.
- 5. For finished grading, adequate grade shall be provided so that water will not pond on lawns for more than 24 hours after rainfall, except in swale flow areas which may drain for as long as 48 hours after rainfall.
- i. All swales and other areas of concentrated flow shall be properly stabilized with temporary control measures to prevent erosion and sediment travel. Surface flows
- over cut and fill areas shall be stabilized at all times.
- . All sites shall be stabilized with erosion control materials within 7 days of final grading. 8. Temporary sediment trapping devices shall be removed from the site within 30 days of final stabilization.

MAINTENANCE SCHEDULE:

	DAILY	WEEKLY	MONTHLY	AFTER RAINFALL	NECESSARY TO MAINTAIN FUNCTION	AFTER APPROVAL OF INSPECTOR
SILT FENCE			INSP.	INSP.	CLEAN/ REPLACE	REMOVE
WHEEL CLEANER	CLEAN				REPLACE	REMOVE
PROTECTION		INSP.	INSP.	CLEAN	REPLACE	REMOVE

MAINTENANCE OF PERMANENT CONTROL STRUCTURES DURING CONSTRUCTION:

The stormwater management system and outlet structure shall be inspected on a regular basis and after every rainfall event. Sediment build up shall be removed from the inlet protection regularly to insure detention capacity and proper drainage. Outlet structure shall be free of obstructions. All piping and drain inlets shall be free of obstruction. Any sediment build up shall be removed.

MAINTENANCE OF CONTROLS AFTER CONSTRUCTION:

Controls (including respective outlet structures) should be inspected periodically for the first few months after construction and on an annual basis thereafter. They should also be inspected after major storm events.

DEBRIS AND LITTER REMOVAL:

Twice a year, inspect outlet structure and drain inlets for accumulated debris. Also, remove any accumulations during each mowing operation. STRUCTURAL REPAIR/REPLACEMENT:

Outlet structure must be inspected twice a year for evidence of structural damage and repaired immediately **EROSION CONTROL**

Unstable areas tributary to the basin shall immediately be stabilized with vegetation or other appropriate erosion control measures.

SEDIMENT REMOVAL: Sediment should be removed after it has reached a maximum depth of five inches above the stormwater management system floor.

Existing topsoil will be removed and stored in piles sufficiently as to avoid mixing with other excavation. Stockpiles shall be surrounded by erosion control as outlined on

CONSTRUCTION -

TEMPORARY SEDIMENT POOL

2 FT MAX

ENTRANCE GRAVEL

SYMBOL

E-4

these plans. The furnishing of new topsoil shall be of a better or equal to the following criteria (SS713.01 NYSDOT): 1. The pH of the material shall be 5.5 to 7.6.

- 2. The organic content shall not be less than 2% or more than 70%.
- 3. Gradation: SIEVE SIZE % PASSING BY WGT.

2 INCH	100
1 INCH	85 TO 100
1/4 INCH	65 TO 100
NO. 200 MESH	20 TO 80

PERMANENT VEGETATIVE COVER:

- 1. Site preparation:
- 1.1. Install erosion control measures. Scarify compacted soil areas.
- Lime as required to ph 6.5. Fertilize with 10-6-4 4 lbs/1,000 S.F.
- Incorporate amendments into soil with disc harrow.
- 2. Seed mixtures for use on swales and cut and fill areas.

••	Occurring to the control of	ioo on onaloo ana oat ana ilii aroao.	
	MIXTURE		LBS./ACRE
	ALT. A	KENTUCKY BLUE GRASS	20
		CREEPING RED FESCUE	28
		RYE GRASS OR REDTOP	5
	ALT. B	CREEPING RED FESCUE	20
	,	REDTOP	2

3.1. Prepare seed bed by raking to remove stones, twigs, roots and other foreign material.

TALL FESCUE/SMOOTH BLOOMGRASS 20

FE: UNAUTHORIZED ALTERATIONS OR ADDITIONS TO THIS DRAWING IS A VIOLATION OF SECTION 7209 (2) OF THE NEW YORK STATE EDUCATION LA

- Apply soil amendments and integrate into soil. Apply seed uniformly by cyclone seeder culti-packer or hydro-seeder at rate indicated.
- Stabilize seeded areas in drainage swales.
- Irrigate to fully saturate soil layer, but not to dislodge planting soil. Seed between April 1st and May 15th or August 15th and October 15th.
- Seeding may occur May 15th and August 15th if adequate irrigation is provided. TEMPORARY VEGETATIVE COVER:

SITE PREPARATION:

1. Install erosion control measures.

- 2. Scarify areas of compacted soil. 3. Fertilize with 10-10-10 at 400/acre.
- 4. Lime as required to ph 6.5.

SEED SPECIES: **MIXTURE** Rapidly germinating annual ryegrass (or approved equal) Perennial ryegrass Cereal oats

SEEDING:

Same as permanent vegetative cover

CONTRACTOR CERTIFICATION STATEMENT

Certification Statement - All contractors and subcontractors as identified in a SWPPP, by the Owner or Operator, in accordance with Part III.A.5 of the SPDES General Permit for Stormwater Runoff from Construction Activity, GP-0-15-002, dated January 29, 2015, Page 10 of 40, shall sign a copy of the following Certification Statement before undertaking any construction activity at the Site identified in the SWPPP:

"I hereby certify that I understand and agree to comply with the terms and conditions of the SWPPP and agree to implement any corrective actions identified by the Qualified Inspector during a site inspection. I also understand that the Owner or Operator must comply with the terms and conditions of the New York State Pollutant Discharge Elimination System ("SPDES") General Permit for Stormwater Discharge from Construction Activities and that it is unlawful for any person to cause or contribute to a violation of water quality standards. Furthermore, I understand that certifying false, incorrect or inaccurate information is a violation of the referenced permit and the laws of the State of New York and could subject me to criminal, civil and/or administrative proceedings."

Individual Contractor:	
Name and Title (please print):	
Signature of Contractor:	
Company / Contracting Firm:	
Name of Company:	
Address of Company:	
Telephone Number / Cell Number:	
Site Information:	
Address of Site:	

OWNER / OPERATOR CERTIFICATION

Today's Date:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. Further, I hereby certify that the SWPPP meets all Federal, State, and local erosion and sediment control requirements. I am aware that false statements made herein are punishable as a Class A misdemeanor pursuant to Section 210.45 of the Penal Law." Name (please print):

TEMPORARY

CONSTRUCTION FENCE


SMALL FEEDER ROOTS AT EDGE OF BRANCH SYSTEM

1. Contractor shall use the tree trunk armor detail for

2. As an alternate, the contractor may protect trees in the vicinity of regular heavy traffic / construction areas or

clusters of trees to be protected as per the construction

solated trees that require protection.

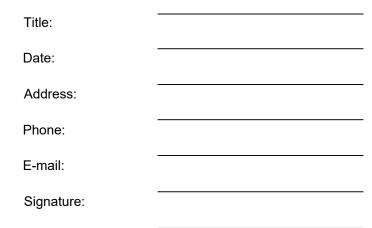

SYMBOL

E-2

" WASHED GRAVEL


-3:1 SLOPE

-2:1 SLOPE

-1FT OF GRAVEL


<u>SECTION</u>


INLET PROTECTION DETAIL

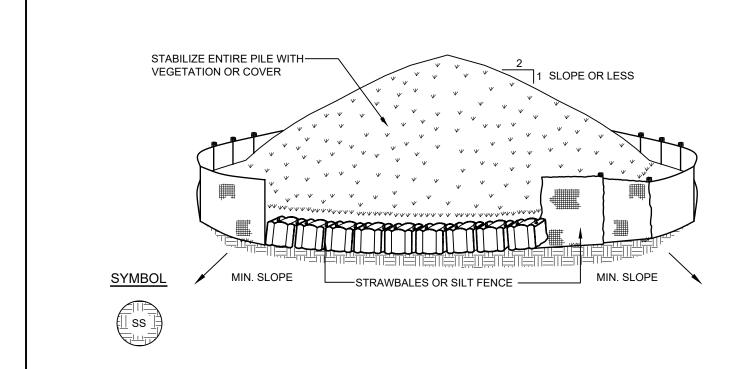


1. Area chosen for stockpiling operations shall be dry and stable

2. Maximum slope of stockpile shall be 1:2. 3. Upon completion of soil stockpilling, each pile shall be surrounded with either silt fencing or strawbales, then stabilized with vegetation or covered 4. See detail for installation of silt fence.



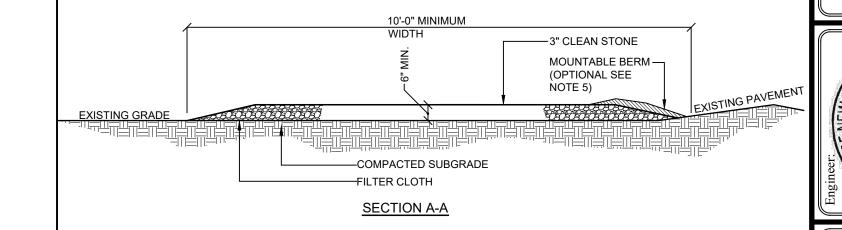

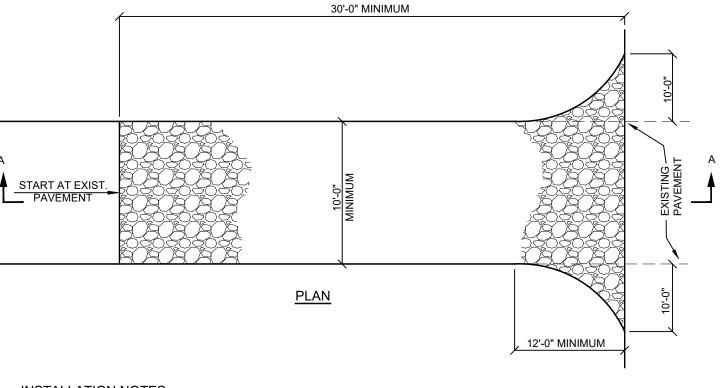

INSTALLATION NOTES:

1. Stone size - use 3" min. Stone, or reclaimed or recycled concrete equivalent.

2. Length - as required, but not less than 50 feet (except on a single residence lot where a 30 foot minimum length would apply. Thickness - not less than six (6) inches. 4. Width - 10 foot minimum, but not less than the full width at points where ingress or egress occur. 24 ft if single entrance to site.

5. Surface water - all surface water flowing or diverted toward construction entrances shall be piped across the entrance. If piping is impractical, a mountable berm with 5:1 slopes will be permitted. 6. Maintenance - the entrance shall be maintained in a condition which will prevent tracking or flowing of sediment onto public right of way this may require periodic top dressing with additional stone as conditions demand and repair and/or cleanouts of any measures used to trap

sediment. All sediment spilled, dropped, washed or tracked onto public right of way must be removed immediately. 7. Washing - wheels shall be cleaned to remove sediment prior to entrance onto public right of way. When washing is required, it shall be done on an area stabilized with stone and which drains into an approved sediment trapping device. 8. Periodic inspection and needed maintenance shall be provided after each rain

STABILIZED CONSTRUCTION ENTRANCE DETAIL

EMBED FILTER -


CLOTH MIN. 6"

INTO GROUND

BOARD FENCE WRAPPED AROUND

TRUNK. 1" GAP BETWEEN BOARDS

E-3

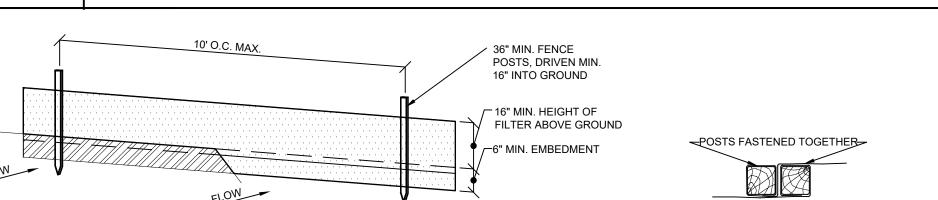



TREE TRUNK ARMOR / TREE PROTECTION DETAIL


2. When two sections of filter cloth adjoin each other they shall be overlapped by 6 inches and folded. Filter cloth shall be mirafi 100x, stabilinka t140n or approved equal

Maintenance shall be performed as needed and material removed when "bulges" develop in the silt fence. 4. Excavate 4 inch trench along the lower perimeter of the site. 5. Unroll a section at a time and position the post against the back (downstream) wall of the trench (net side away from direction of flow). 6. Drive the post into the ground until the netting is approximately 2 inches from the trench bottom.

7. Lay the toe-in flap of fabric onto the undisturbed bottom of the trench, backfill the trench and tamp the soil. Steeper slopes require an intercept trench. Join sections as shown above.

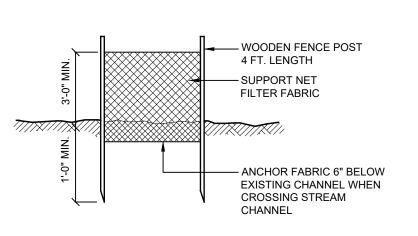

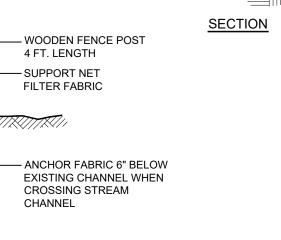

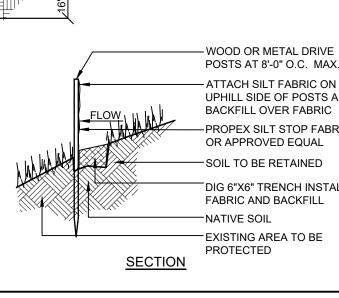

X

sign

POSTS AT 8'-0" O.C. MAX. ATTACH SILT FABRIC ON UPHILL SIDE OF POSTS AND BACKFILL OVER FABRIC PROPEX SILT STOP FABRIC OR APPROVED EQUAL DIG 6"X6" TRENCH INSTALL FABRIC AND BACKFILL EXISTING AREA TO BE

SILT FENCE DETAIL


Filter cloth to be fastened securely to post: steel either t or u type or 2" hardwood posts at top and mid section.


PLAN VIEW: JOINING SECTIONS

ELEVATION



E-5

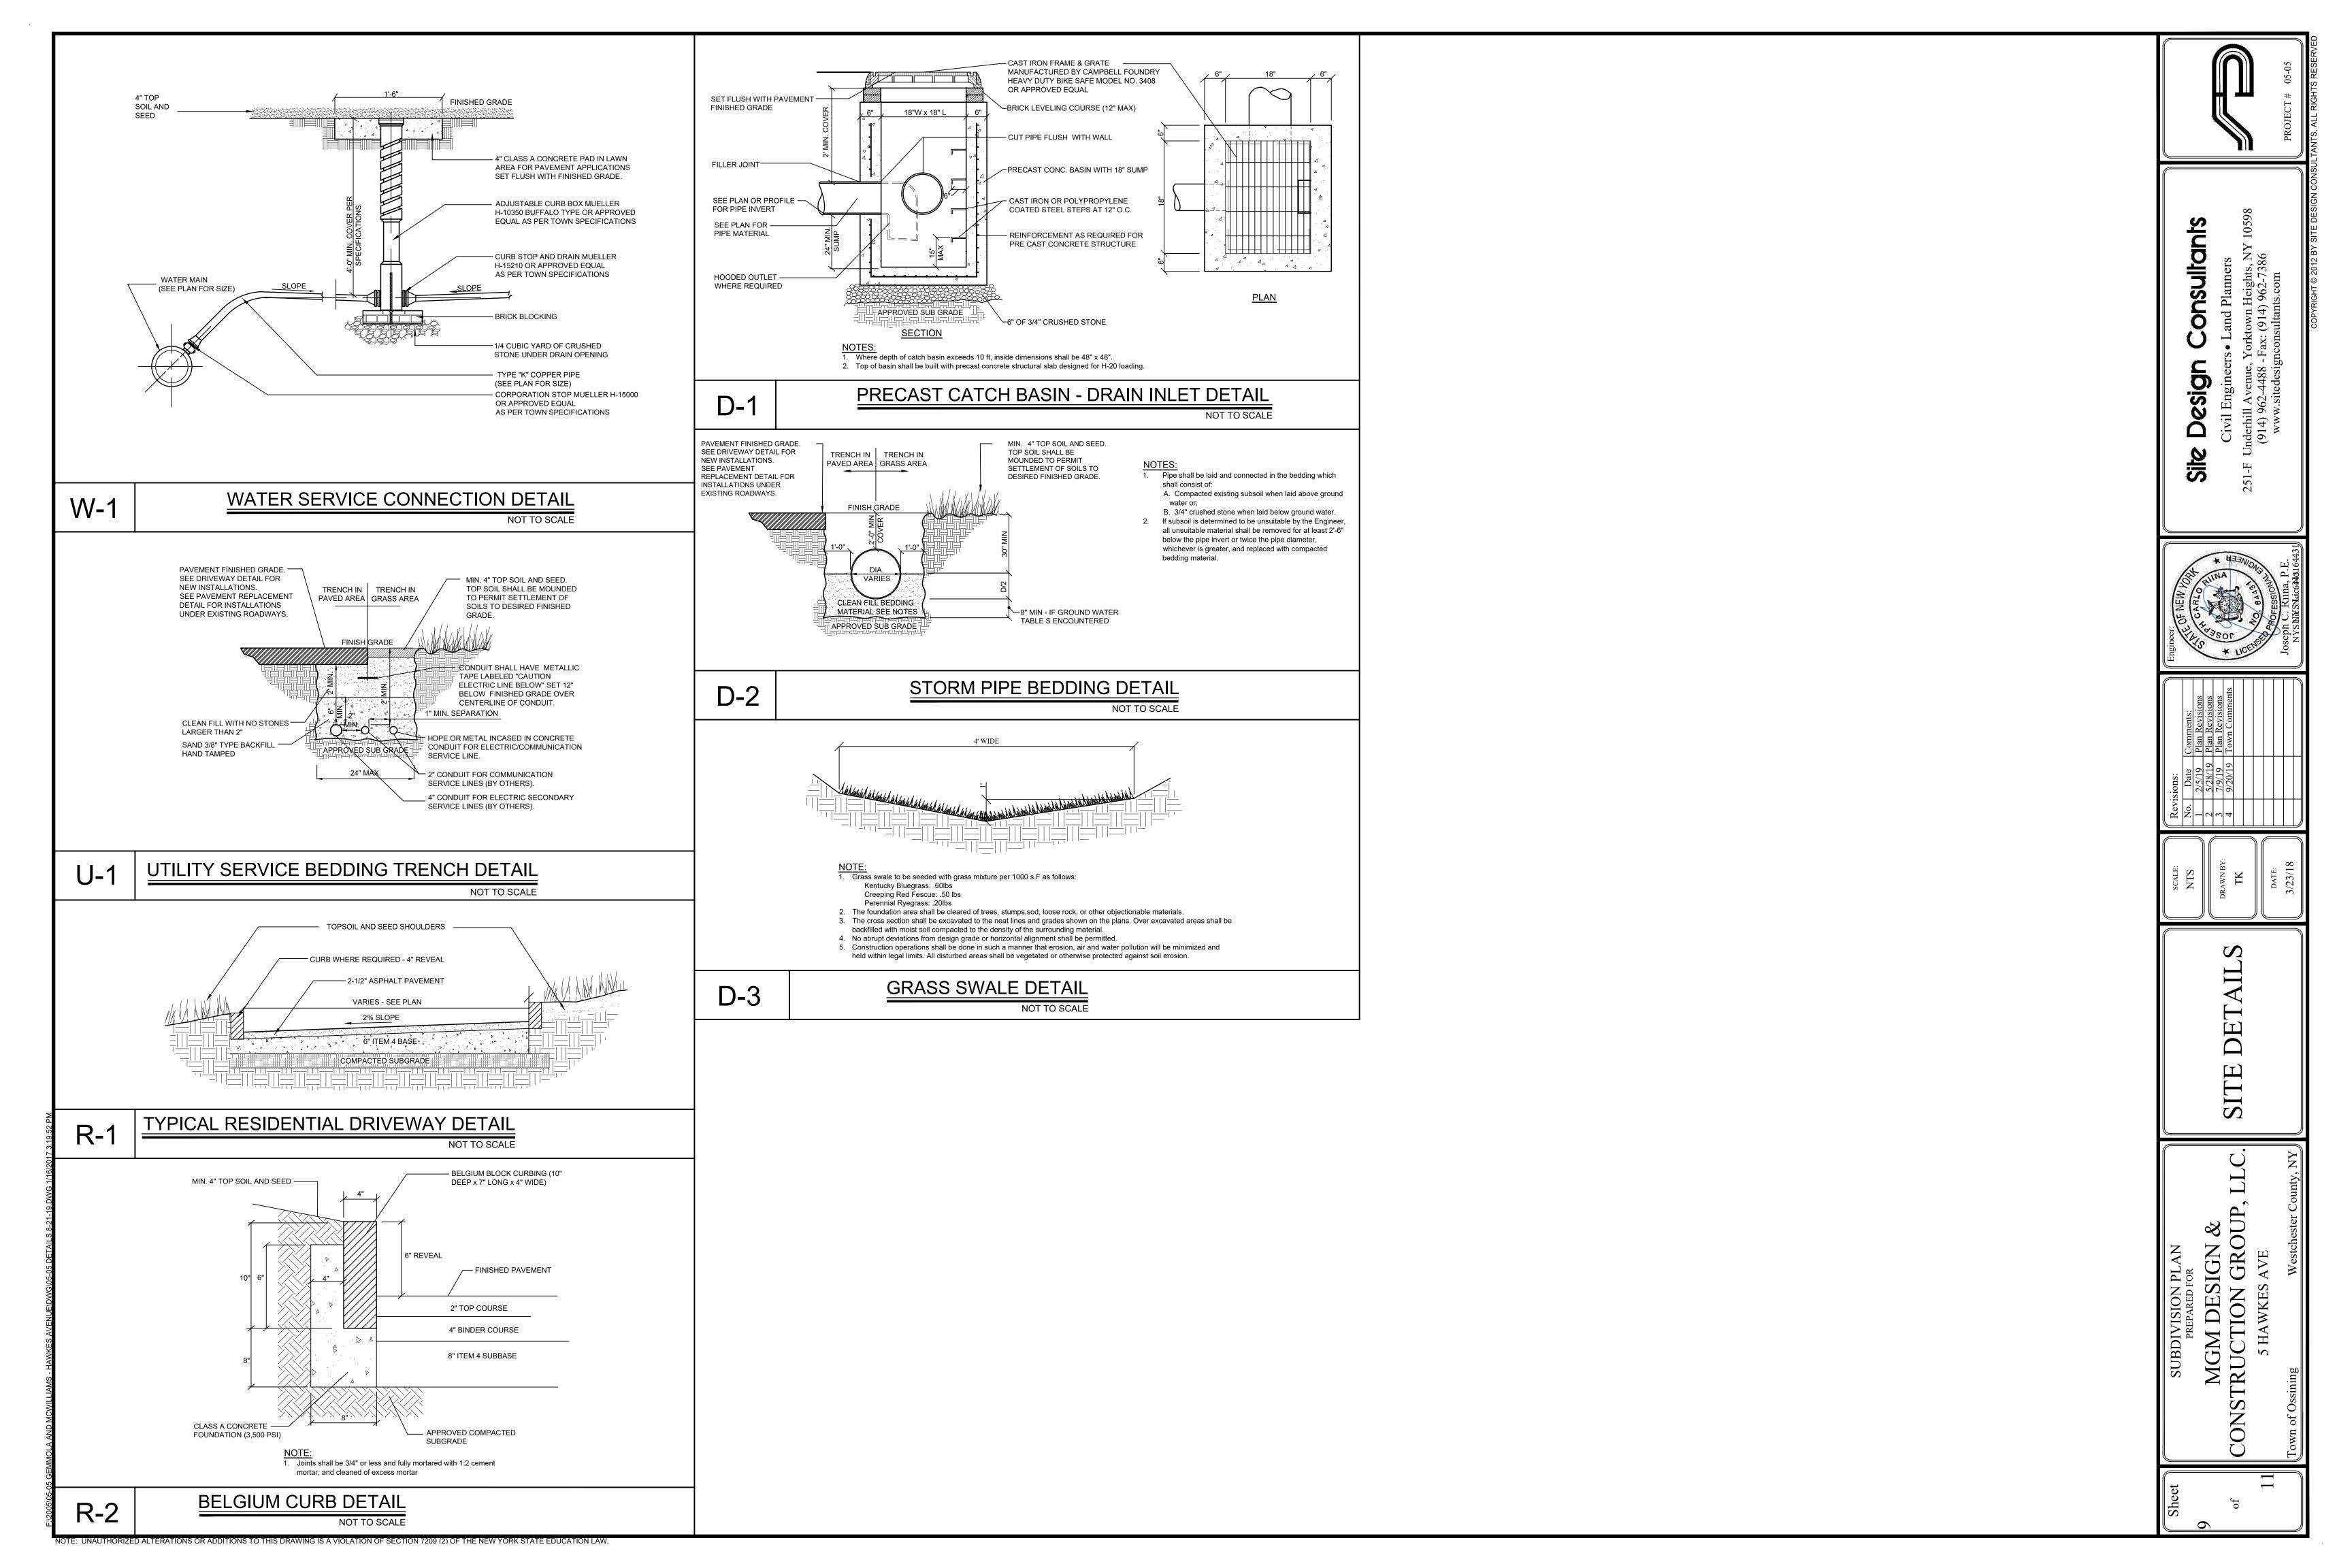

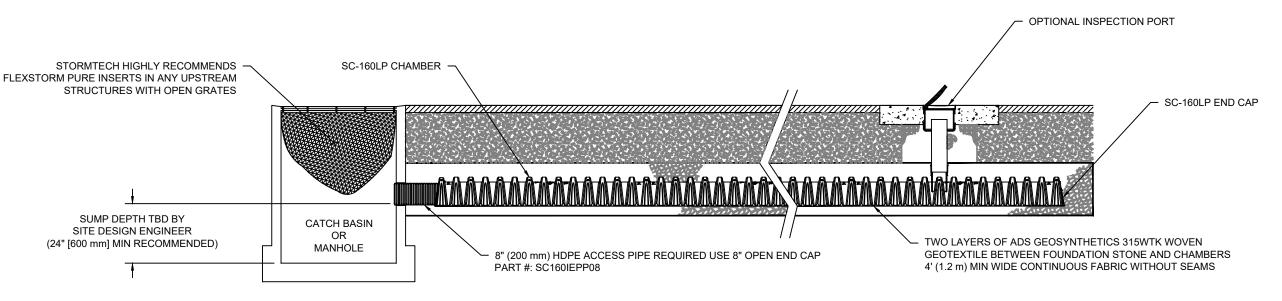

SC-160LP ISOLATOR ROW DETAIL

INSPECTION & MAINTENANCE


STEP 1) INSPECT ISOLATOR ROW FOR SEDIMENT


- A. INSPECTION PORTS (IF PRESENT) A.1. REMOVE/OPEN LID ON NYLOPLAST INLINE DRAIN
- A.2. REMOVE AND CLEAN FLEXSTORM FILTER IF INSTALLED A.3. USING A FLASHLIGHT AND STADIA ROD, MEASURE DEPTH OF SEDIMENT AND RECORD ON MAINTENANCE LOG
- A.4. LOWER A CAMERA INTO ISOLATOR ROW FOR VISUAL INSPECTION OF SEDIMENT LEVELS (OPTIONAL) A.5. IF SEDIMENT IS AT, OR ABOVE, 3" (80 mm) PROCEED TO STEP 2. IF NOT, PROCEED TO STEP 3.
- B.1. REMOVE COVER FROM STRUCTURE AT UPSTREAM END OF ISOLATOR ROW B.2. USING A FLASHLIGHT, INSPECT DOWN THE ISOLATOR ROW THROUGH OUTLET PIPE
- MIRRORS ON POLES OR CAMERAS MAY BE USED TO AVOID A CONFINED SPACE ENTRY ii) FOLLOW OSHA REGULATIONS FOR CONFINED SPACE ENTRY IF ENTERING MANHOLE
- B.3. IF SEDIMENT IS AT, OR ABOVE, 3" (80 mm) PROCEED TO STEP 2. IF NOT, PROCEED TO STEP 3.
- STEP 2) CLEAN OUT ISOLATOR ROW USING THE JETVAC PROCESS A. A FIXED CULVERT CLEANING NOZZLE WITH REAR FACING SPREAD OF 45" (1.1 m) OR MORE IS PREFERRED
- B. APPLY MULTIPLE PASSES OF JETVAC UNTIL BACKFLUSH WATER IS CLEAN C. VACUUM STRUCTURE SUMP AS REQUIRED
- STEP 3) REPLACE ALL COVERS, GRATES, FILTERS, AND LIDS; RECORD OBSERVATIONS AND ACTIONS. STEP 4) INSPECT AND CLEAN BASINS AND MANHOLES UPSTREAM OF THE STORMTECH SYSTEM.


- 1. INSPECT EVERY 6 MONTHS DURING THE FIRST YEAR OF OPERATION. ADJUST THE INSPECTION INTERVAL BASED ON PREVIOUS OBSERVATIONS OF SEDIMENT ACCUMULATION AND HIGH WATER ELEVATIONS.
- 2. CONDUCT JETTING AND VACTORING ANNUALLY OR WHEN INSPECTION SHOWS THAT MAINTENANCE IS NECESSARY

STORMTECH SC-740 CHAMBER DETENTION ISOLATOR ROW DETAIL

SC-160LP TECHNICAL SPECIFICATION

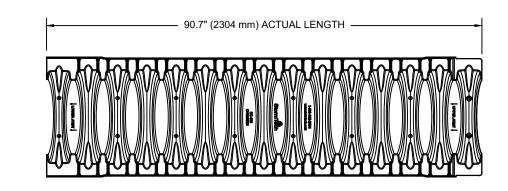

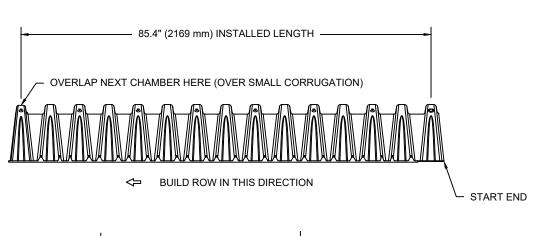

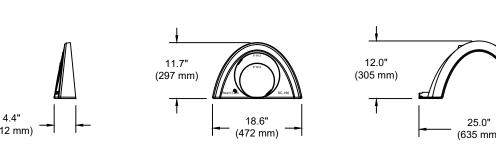

NOMINAL CHAMBER SPECIFICATIONS SIZE (W X H X INSTALLED LENGTH) CHAMBER STORAGE MINIMUM INSTALLED STORAGE

25.0" X 12.0" X 85.4" (635 mm X 305 mm X 2169 mm) 6.85 CUBIC FEET (0.19 m³) 16.0 CUBIC FEET 24.0 lbs.


*ASSUMES 6" (152 mm) ABOVE, 6" (152 mm) BELOW, AND STONE BETWEEN CHAMBERS WITH 40% STONE POROSITY.

PART#	STUB	Α
00400555	6" (150 mm)	0.66" (16 mm)
SC160EPP	8" (200 mm)	0.80" (20 mm)
SC160EPP08	8" (200 mm)	0.96" (24 mm)

DIAMETER OF THE STUB IS FLUSH WITH THE BOTTOM OF THE END CAP. FOR ADDITIONAL INFORMATION CONTACT STORMTECH AT 1-888-892-2694.

NOTE: ALL DIMENSIONS ARE NOMINAL

STORMTECH SC-160L CHAMBER DETAIL

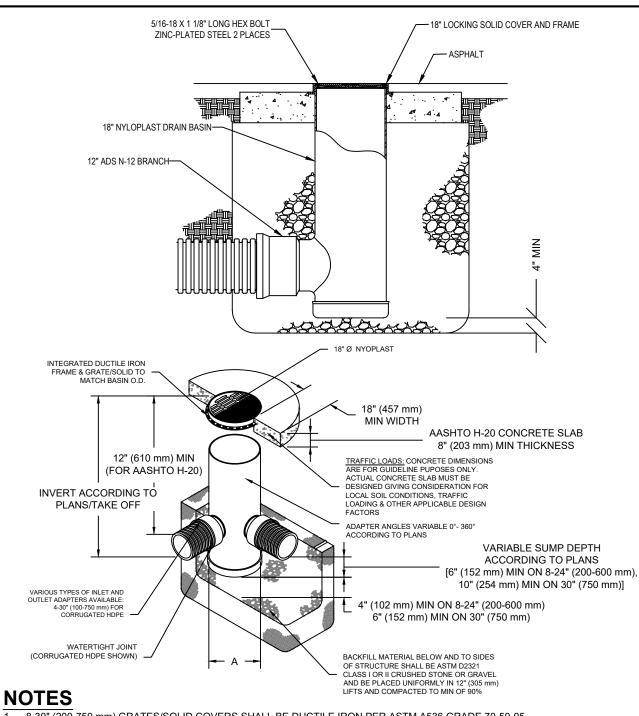

8-30" (200-750 mm) GRATES/SOLID COVERS SHALL BE DUCTILE IRON PER ASTM A536 GRADE 70-50-05 12-30" (300-750 mm) FRAMES SHALL BE DUCTILE IRON PER ASTM A536 GRADE 70-50-05 DRAIN BASIN TO BE CUSTOM MANUFACTURED ACCORDING TO PLAN DETAILS DRAINAGE CONNECTION STUB JOINT TIGHTNESS SHALL CONFORM TO ASTM D3212 FOR CORRUGATED HDPE (ADS &


HANCOR DUAL WALL) & SDR 35 PVC FOR COMPLETE DESIGN AND PRODUCT INFORMATION: WWW.NYLOPLAST-US.COM TO ORDER CALL: 800-821-6710

NYOPLAST DRAINAGE BASIN DETAIL

ACCEPTABLE FILL MATERIALS: STORMTECH SC-160LP CHAMBER SYSTEMS

	MATERIAL LOCATION	DESCRIPTION	AASHTO MATERIAL CLASSIFICATIONS	COMPACTION / DENSITY REQUIREMENT
D	FINAL FILL: FILL MATERIAL FOR LAYER 'D' STARTS FROM THE TOP OF THE 'C' LAYER TO THE BOTTOM OF FLEXIBLE PAVEMENT OR UNPAVED FINISHED GRADE ABOVE. NOTE THAT PAVEMENT SUBBASE MAY BE PART OF THE 'D' LAYER	ANY SOIL/ROCK MATERIALS, NATIVE SOILS, OR PER ENGINEER'S PLANS. CHECK PLANS FOR PAVEMENT SUBGRADE REQUIREMENTS.	N/A	PREPARE PER SITE DESIGN ENGINEER'S PLANS. PAVED INSTALLATIONS MAY HAVE STRINGENT MATERIAL AND PREPARATION REQUIREMENTS.
С	INITIAL FILL: FILL MATERIAL FOR LAYER 'C' STARTS FROM THE TOP OF THE EMBEDMENT STONE ('B' LAYER) TO 14" (355 mm) ABOVE THE TOP OF THE CHAMBER. NOTE THAT PAVEMENT SUBBASE MAY BE A PART OF THE 'C' LAYER.	GRANULAR WELL-GRADED SOIL/AGGREGATE MIXTURES, <35% FINES OR PROCESSED AGGREGATE. MOST PAVEMENT SUBBASE MATERIALS CAN BE USED IN LIEU OF THIS LAYER.	AASHTO M145 ¹ A-1, A-2-4, A-3 OR AASHTO M43 ¹ 3, 357, 4, 467, 5, 56, 57, 6, 67, 68, 7, 78, 8, 89, 9, 10	BEGIN COMPACTIONS AFTER 12" (300 mm) OF MATERIAL OVER THE CHAMBERS IS REACHED. COMPACT ADDITIONAL LAYERS IN 6" (150 mm) MAX LIFTS TO A MIN. 95% PROCTOR DENSITY FOR WELL GRADED MATERIAL AND 95% RELATIVE DENSITY FOR PROCESSED AGGREGATE MATERIALS. ROLLER GROSS VEHICLE WEIGHT NOT TO EXCEED 12,000 lbs (53 kN). DYNAMIC FORCE NOT TO EXCEED 20,000 lbs (89 kN).
В	EMBEDMENT STONE: FILL SURROUNDING THE CHAMBERS FROM THE FOUNDATION STONE ('A' LAYER) TO THE 'C' LAYER ABOVE.	CLEAN, CRUSHED, ANGULAR STONE	AASHTO M43¹ 3, 357, 4, 467, 5, 56, 57	NO COMPACTION REQUIRED.
А	FOUNDATION STONE: FILL BELOW CHAMBERS FROM THE SUBGRADE UP TO THE FOOT (BOTTOM) OF THE CHAMBER.	CLEAN, CRUSHED, ANGULAR STONE	AASHTO M43 ¹ 3, 357, 4, 467, 5, 56, 57	PLATE COMPACT OR ROLL TO ACHIEVE A FLAT SURFACE. ^{2,3}

- THE LISTED AASHTO DESIGNATIONS ARE FOR GRADATIONS ONLY. THE STONE MUST ALSO BE CLEAN, CRUSHED, ANGULAR. FOR EXAMPLE, A SPECIFICATION FOR #4 STONE WOULD STATE: "CLEAN, CRUSHED, ANGULAR NO. 4 (AASHTO M43) STONE". STORMTECH COMPACTION REQUIREMENTS ARE MET FOR 'A' LOCATION MATERIALS WHEN PLACED AND COMPACTED IN 6" (150 mm) (MAX) LIFTS USING TWO FULL COVERAGES WITH A VIBRATORY COMPACTOR.
- WHERE INFILTRATION SURFACES MAY BE COMPROMISED BY COMPACTION, FOR STANDARD DESIGNS, CONTACT STORMTECH FOR
- 4. ONCE LAYER 'C' IS PLACED, ANY SOIL/MATERIAL CAN BE PLACED IN LAYER 'D' UP TO THE FINISHED GRADE. MOST PAVEMENT SUBBASE SOILS CAN BE USED TO REPLACE THE MATERIAL REQUIREMENTS OF LAYER 'C' OR 'D' AT THE SITE DESIGN ENGINEER'S DISCRETION.

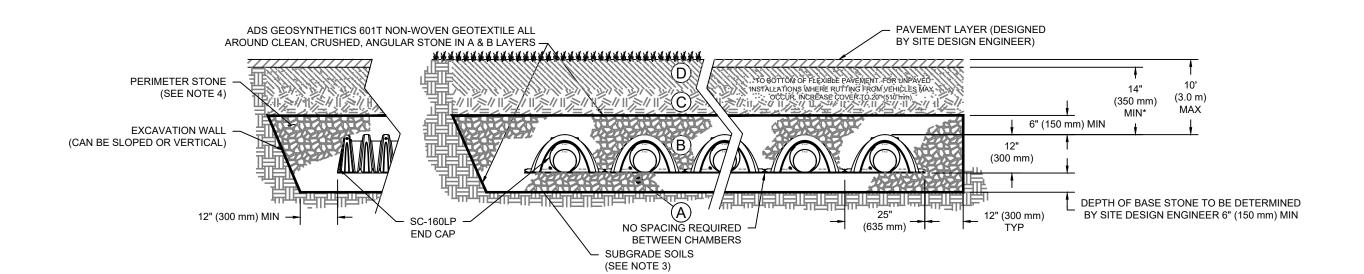


NOTES:

- 1. CHAMBERS SHALL MEET THE REQUIREMENTS OF ASTM F2418-16a, "STANDARD SPECIFICATION FOR POLYPROPYLENE (PP) CORRUGATED WALL STORMWATER COLLECTION CHAMBERS".
- 2. CHAMBERS SHALL BE DESIGNED, TESTED AND ALLOWABLE LOAD CONFIGURATIONS DETERMINED IN ACCORDANCE WITH ASTM F2787, "STANDARD PRACTICE FOR STRUCTURAL DESIGN OF THERMOPLASTIC CORRUGATED WALL STORMWATER COLLECTION CHAMBERS". LOAD CONFIGURATIONS SHALL INCLUDE: 1) INSTANTANEOUS (<1 MIN) AASHTO DESIGN TRUCK LIVE LOAD ON MINIMUM
- COVER 2) MAXIMUM PERMANENT (75-YR) COVER LOAD AND 3) ALLOWABLE COVER WITH PARKED (1-WEEK) AASHTO DESIGN TRUCK. 3. THE SITE DESIGN ENGINEER IS RESPONSIBLE FOR ASSESSING THE BEARING RESISTANCE (ALLOWABLE BEARING CAPACITY) OF THE SUBGRADE SOILS AND THE DEPTH OF FOUNDATION STONE WITH
- CONSIDERATION FOR THE RANGE OF EXPECTED SOIL MOISTURE CONDITIONS. 4. PERIMETER STONE MUST BE EXTENDED HORIZONTALLY TO THE EXCAVATION WALL FOR BOTH VERTICAL AND SLOPED EXCAVATION WALLS.
- 5. REQUIREMENTS FOR HANDLING AND INSTALLATION:
- TO MAINTAIN THE WIDTH OF CHAMBERS DURING SHIPPING AND HANDLING, CHAMBERS SHALL HAVE INTEGRAL, INTERLOCKING STACKING LUGS • TO ENSURE A SECURE JOINT DURING INSTALLATION AND BACKFILL, THE HEIGHT OF THE CHAMBER JOINT SHALL NOT BE LESS THAN 1.5"
- TO ENSURE THE INTEGRITY OF THE ARCH SHAPE DURING INSTALLATION, a) THE ARCH STIFFNESS CONSTANT AS DEFINED IN SECTION 6.2.8 OF ASTM F2418 SHALL BE GREATER THAN OR EQUAL TO 400 LBS/IN/IN. AND b) TO RESIST CHAMBER DEFORMATION DURING INSTALLATION AT ELEVATED TEMPERATURES (ABOVE 73° F / 23° C), CHAMBERS SHALL BE PRODUCED FROM REFLECTIVE GOLD OR YELLOW COLORS.

SWM-4

STORMTECH SC-740 CHAMBER DETAIL

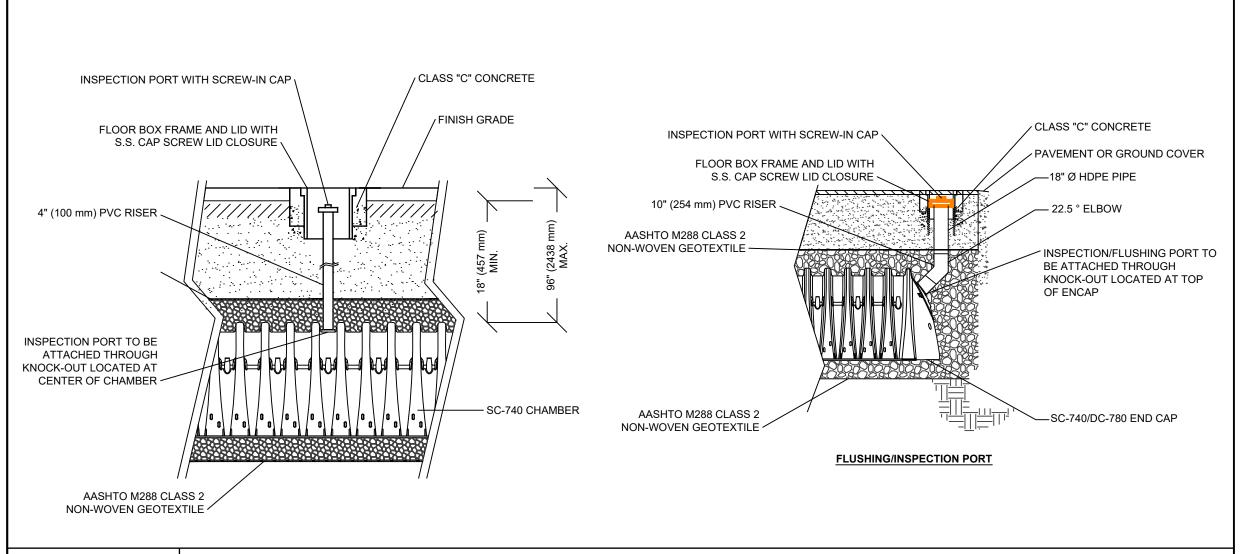

SWM-2

STORMTECH SC-740 INSPECTION/ FLUSHING PORT DETAIL



TER ATI

 \simeq

